

FLOOR & TILES





Decovita set out on a journey to develop our highly diverse and quality products at affordable prices.

With our superior design and quality, we blend an optimum level of both traditional and modern looks. Created using the highest standards and latest technology in the ceramics industry, our products are now available in more than 50 countries including USA, UK, Germany, France, Spain.

Our finishes include Polished, Satin Matte, Textured Stone, Textured Wood, DRY Granule and Sugar Effect. We embellish these surfaces with Natural Stone, Wood, Concrete, Marble and Textile textures.

Our exclusive glazing technology protects our tiles against scratching and harsh chemicals such as bleach. We also offer three-dimensional surfaces with a natural stone texture. To preserve this natural look we have reduced the grout line from a standard 3mm, to 1mm with our high-calibration standards.

DECOVITA-USA INC.

USA HEADQUARTERS & VIRGINIA SALES and DISTRIBUTION CENTER

45190 Prologis Plaza, Suite 190, Sterling, VA 20166 Office: (+1) 571 926 83 26


CALIFORNIA SALESand DISTRIBUTION CENTER

1623-1625 S. Sunkist St. Anaheim, CA 92806 Office: (+1) 714 406 15 00

TEXAS SALES and DISTRIBUTION CENTER

5870 W. Fuqua Street Suite #100 Houston Texas, 77085 **Office:** (+1) 281 915-0884

E-mail: info@decovitausa.com www.decovitausa.com

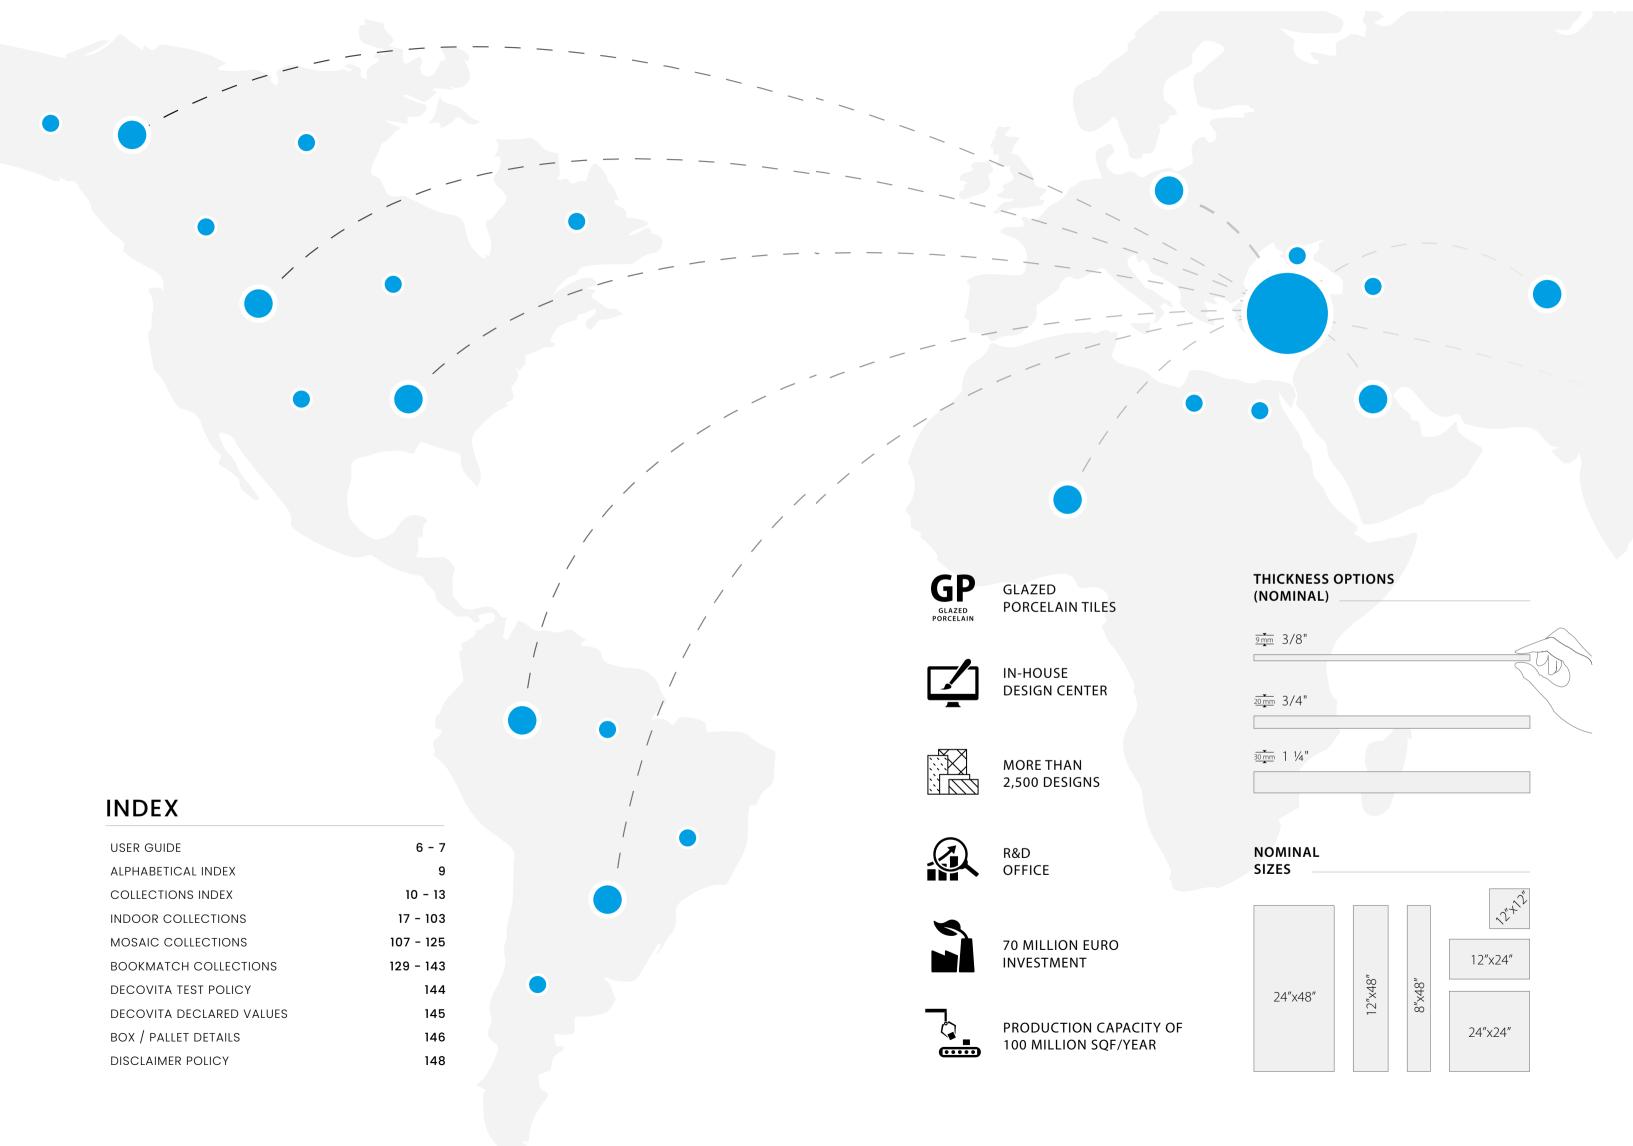

TECHNICAL INFORMATION



GLAZED PORCELAIN TILE





TILE



WATER ABSORPTION



RESISTANT

INKJET TECHNOLOGY



ROTOCOLOR TECHNOLOGY





MIN. GROUT JOINT 1 MM.



PATTERN VARIATIONS









SLIP RESISTANCE VALUE

Inclination angle $> 6^{\circ} - 10^{\circ}$ / low static friction R9 (Entrances, Bathrooms, Kitchens)


Inclination angle $> 10^{\circ} - 19^{\circ}$ / normal static friction R10 (Storage Areas)


Inclination angle $> 19^{\circ} - 27^{\circ}$ / raised static friction R11 (Restaurants, Dining Halls)

Inclination angle > 27° - 35° / high static friction (Industrial Kitchens, Firefighting Buildings)

Inclination angle $> 35^{\circ}$ / very high static friction R13 (Especially on slopes and high floor wear areas)

R9 products are recommended for indoor use. R10, R11, R12, R13 products are recommended for outdoor use.

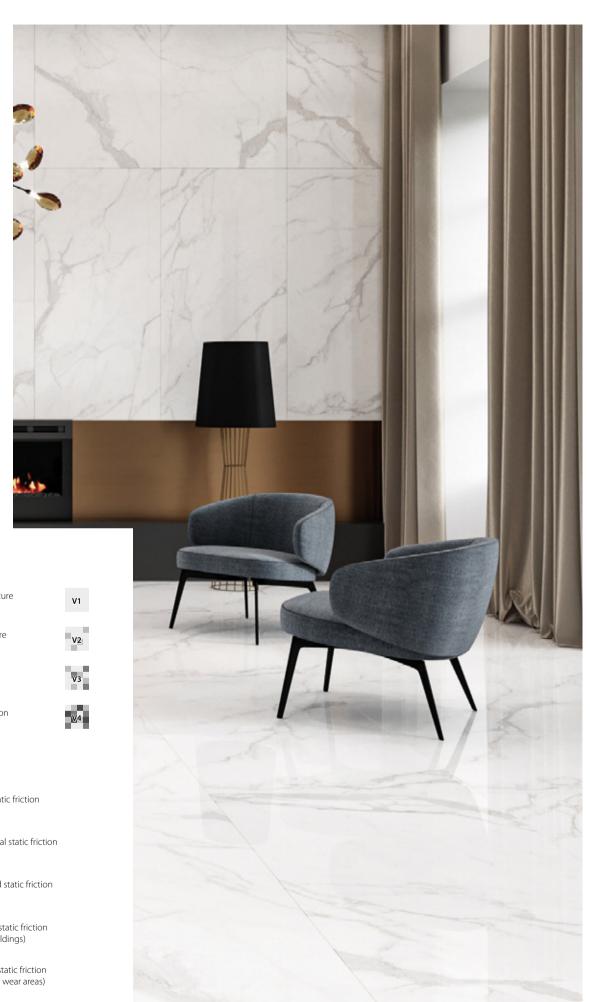

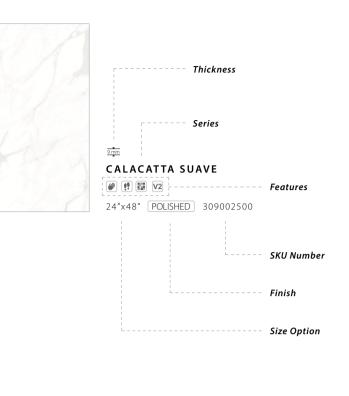


What is Relief? Tiles with various indentations and

Size

Bookmatch available

protrusions on the surface.



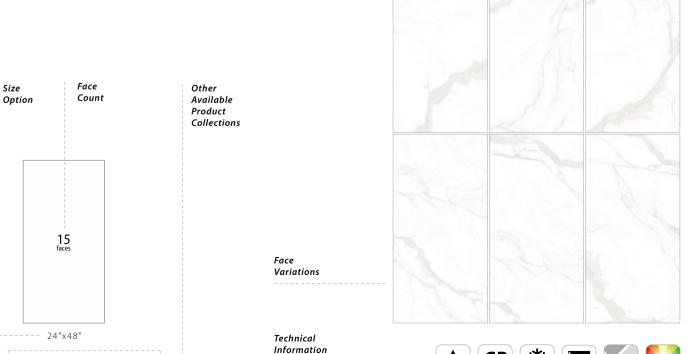












"Nature inspired us"

A range of natural textures and colors featuring surprising realism that also offers all the technical and practical advantages.

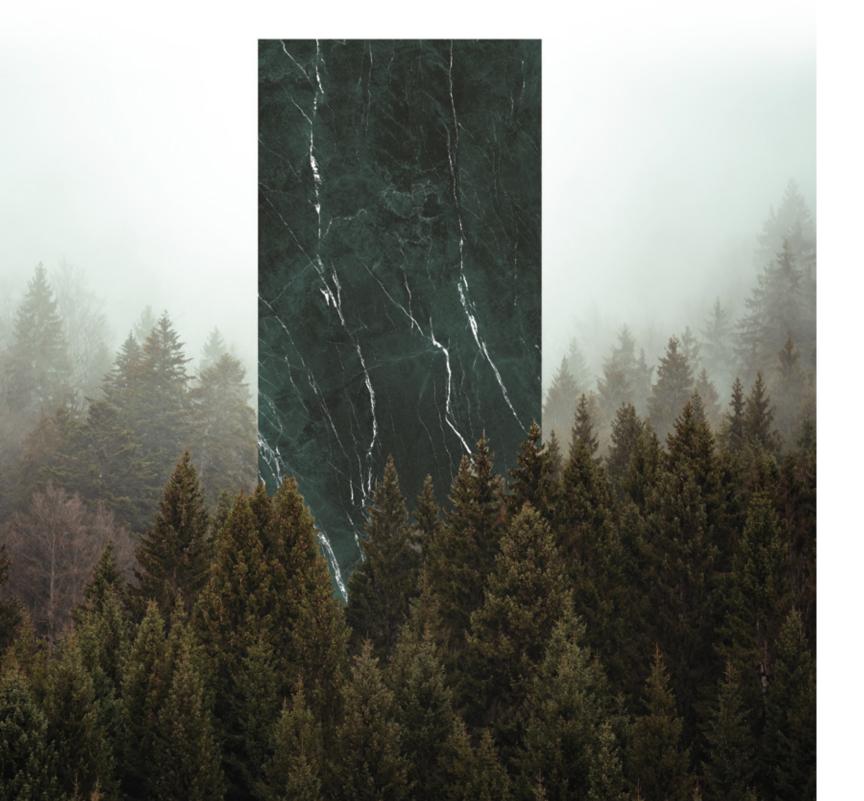

INDOOR collection

ALPHABETICAL INDEX

١	ANTIQUE	17
3	BIRMINGHAM	19
	BLUESTONE	21
	BURNING WOOD	23
-	CALABRIA	25
	CALACATTA	27-29
	CALACATTA GLAM	31
	CALACATTA SUAVE	33
	CEMENT	35
	CLAY	37
	CORE	39
	CROSSOVER	41
)	DOLOMITE	43
	EPIRO	45
=	FULL BLACK	47
	FULL WHITE	49
3	GRIGIO	51
Λ	MARMO METALLO	53
	MIRA	55
1	NAMBIA	57
)	ONYX ALAVASTRO	59
	ONYX CASPIAN	61
	ONYX GOLDEN CLOUD	63
	ONYX MOON	65
	ONYX NOVA	75
	ONYX OPERA	67
	ONYX OSTRA	69
	ONYX PEARL	71
	ONYX SMOKE	73
	ORLANDO	77
•	PANTHEON	79
	PIETRA	81
	PIETROSA MARBLE	83
	PIETROSA SAND	85
5	SAHARA NOIR	87
	SCARLET	89
	SERPEGIANTE	91
	SOFTWOOD	93
	STATUARIO	95
	STRATOS	97
Γ	TERRE	99
/ V	VOLAKAS	101
V	WINDSOR	103

BOOKMATCH


collection

CAFFE BOOKMATCH	129	c	CALACATTA (HEXAGON)	107-10
NEW BIANCO CARRARA	131		CALACATTA (SQUARE)	11
BOOKMATCH			CLAY (SQUARE)	11
NEW CALACATTA BOOKMATCH	133		CORE (HEXAGON)	11
NEW ICELAND BOOKMATCH	135	F	FULL BLACK (SQUARE)	11
NEW ONYX LOTUS BOOKMATCH	137		FULL WHITE (SQUARE)	11
NEW ONYX OPERA BOOKMATCH	139	м	MIRA (SQUARE)	12
NEW ONYX PERLA BOOKMATCH	141	N.	NAMBIA (SQUARE)	12
NEW ZENITH BOOKMATCH	143	D	PIETRA (SOLIARE)	12

MOSAIC

collection

INDOOR

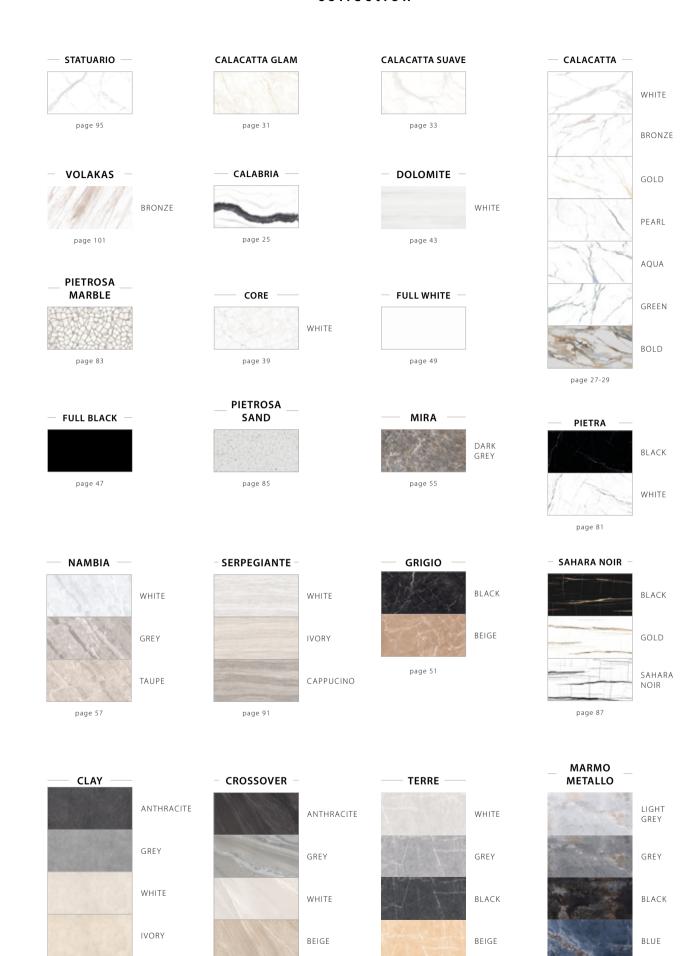


page 37

page 41

page 99

page 53

INDOOR

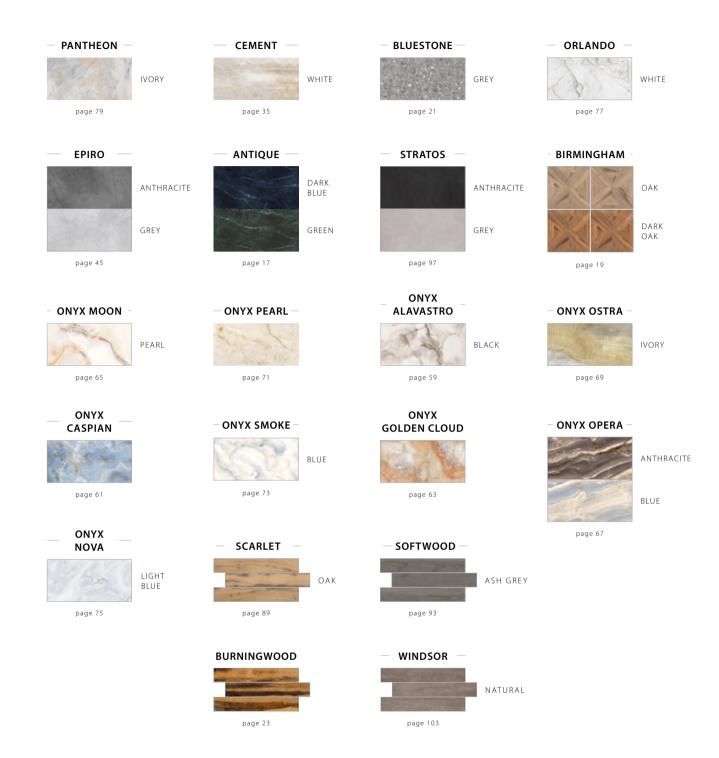

BOOKMATCH

MOSAIC collection

NEW BIANCO CARRARA BOOKMATCH



NEW ICELAND BOOKMATCH





NEW ONYX PERLA BOOKMATCH



page 141

NEW ONYX LOTUS воокматсн



page 137

NEW ZENITH BOOKMATCH

page 135



page 143

CAFFE BOOKMATCH

page 133



МОСНА

page 129


NEW ONYX OPERA BOOKMATCH



page 139

HEXAGON


page 107-109 CALACATTA HEXAGON

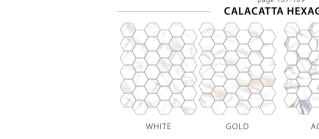





SQUARE



page 123 NAMBIA SQUARE





page 113
CLAY SQUARE









FULL BLACK SQUARE

FULL WHITE SQUARE



page 117







page 125






INDOOR collection








ANTIQUE Green 24"x48" POLISHED 309075906

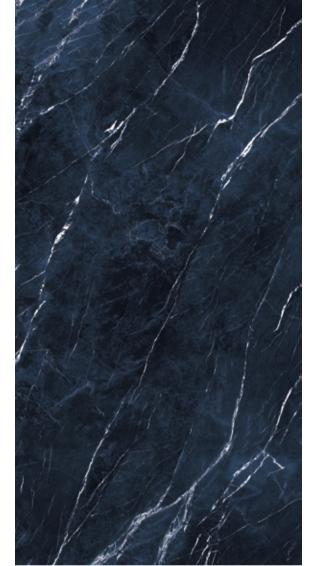

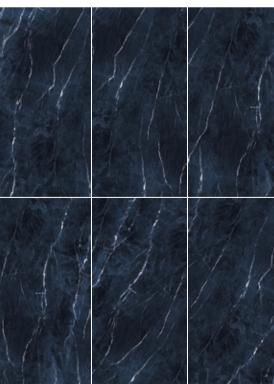













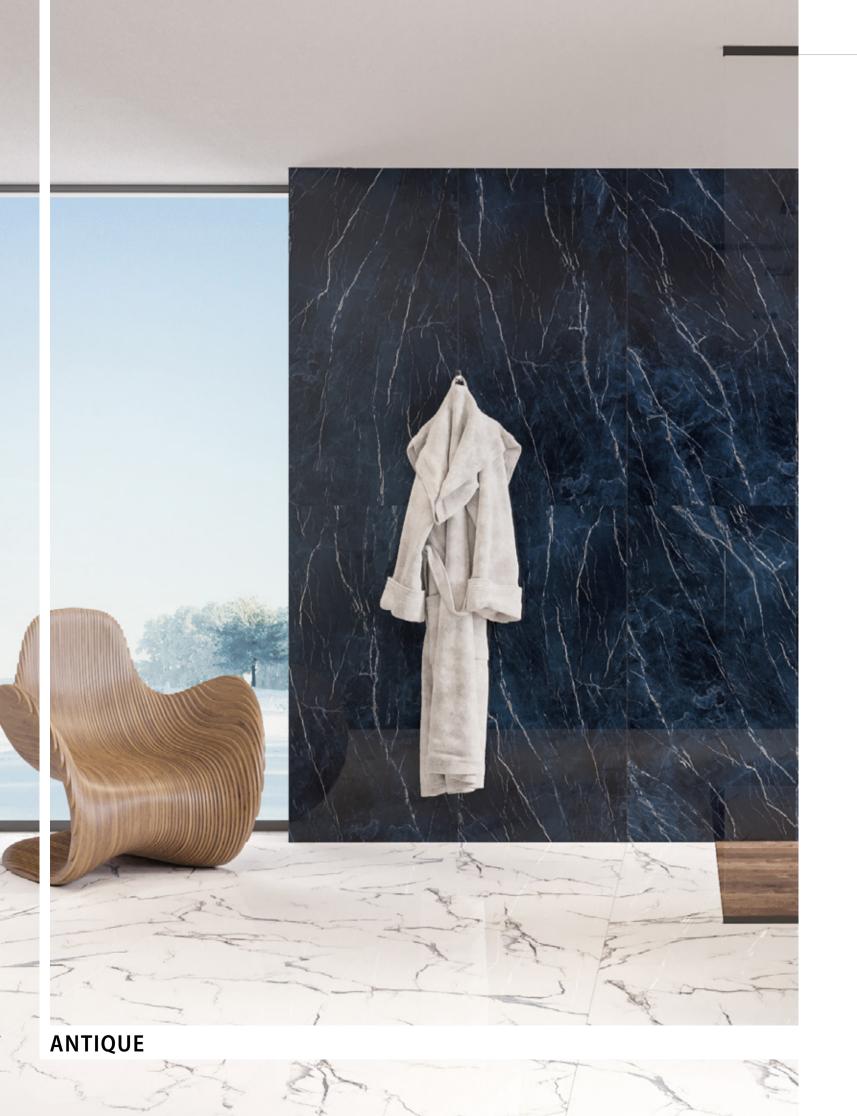



12"x24"



BIRMINGHAM



BIRMINGHAM OAK

24"x24" TEXTURED WOOD 109038470



BIRMINGHAM DARK OAK

24"x24" TEXTURED WOOD 100038485



















BLUESTONE



BLUESTONE GREY

24"x48" TEXTURED STONE 309073609



24"x48"

Outdoor available

















BURNING WOOD Ø

V2 8"x48" TEXTURED WOOD 329016117

BURNING WOOD














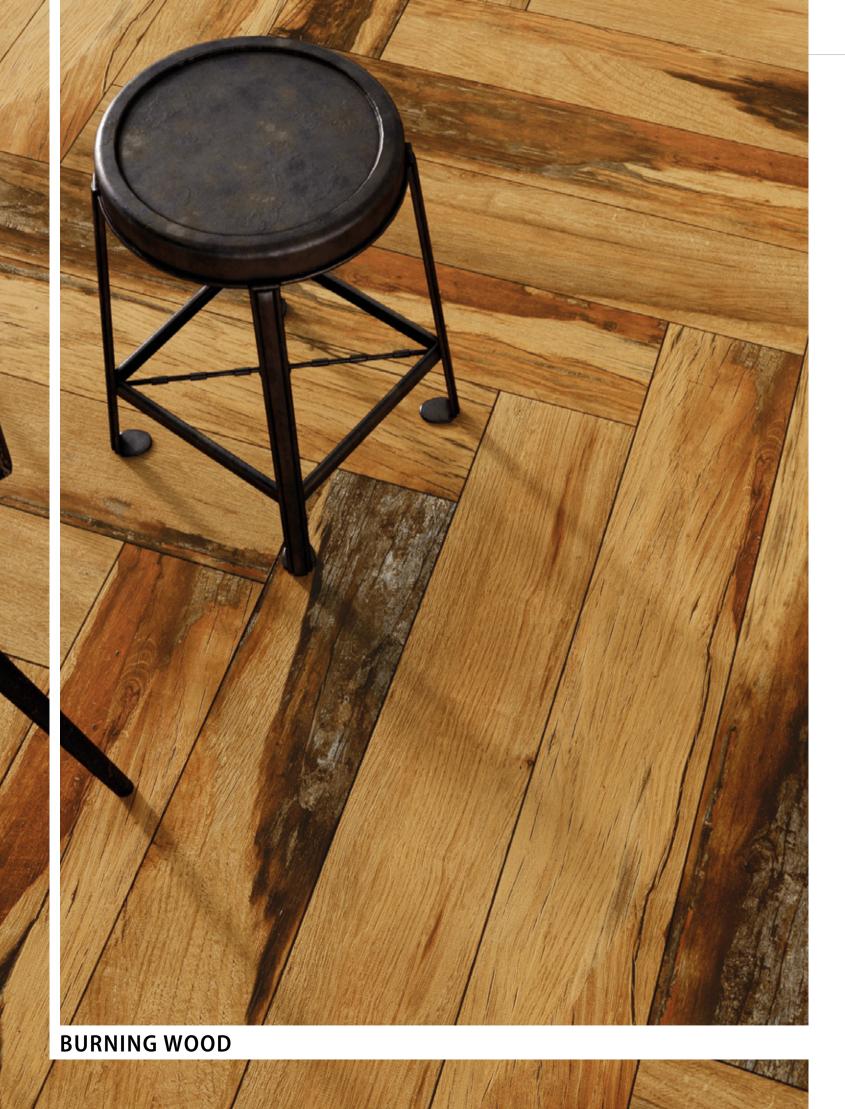

18 faces




CALABRIA



9 mm CALABRIA 24"x48" POLISHED 309056510



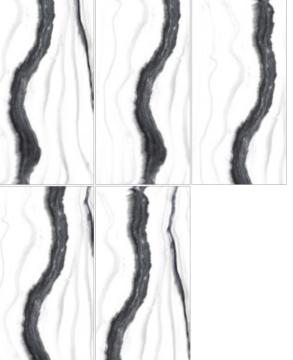














CALABRIA







Bookmatch, Outdoor and Mosaic available


















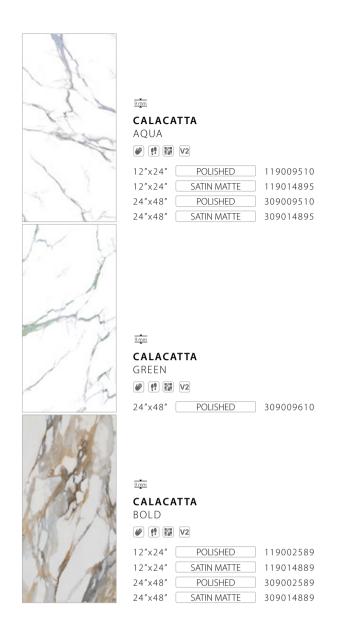


15 faces

24"x48"

12"x24"

Bookmatch, Outdoor and Mosaic available



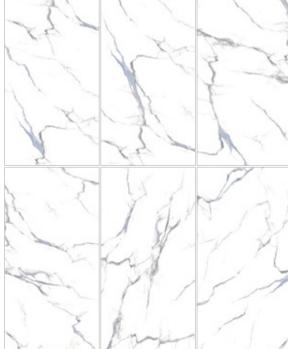













CALACATTA GLAM



CALACATTA GLAM 24"x48" POLISHED 309056310













CALACATTA SUAVE



CALACATTA SUAVE 24"x48" POLISHED 309002500

















15 faces





omm CEMENT WHITE

24"x48" TEXTURED STONE 309033710


















6 faces

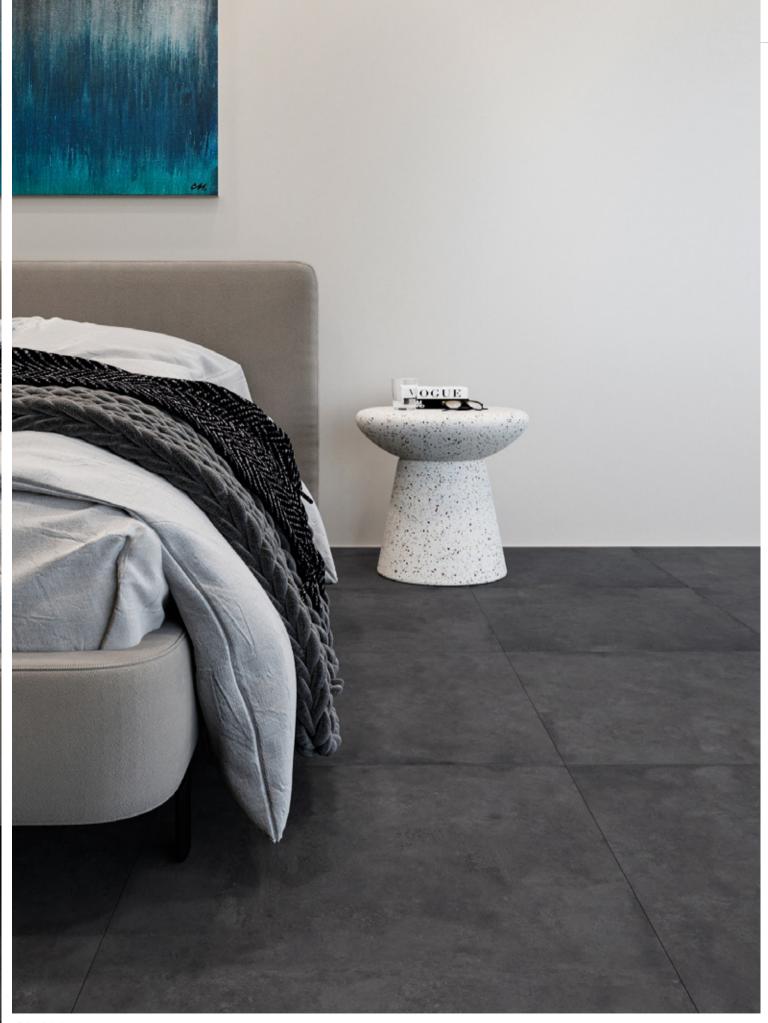




CLAY ANTHRACITE 12"x24" TEXTURED STONE 119027168 24"x48" TEXTURED STONE 309027168 CLAY GREY 12"x24" TEXTURED STONE 119027109 24"x48" TEXTURED STONE 309027109

> 9 mm CLAY WHITE **₩** 👭 🖫 V2

12"x24" TEXTURED STONE 119027110 24"x48" TEXTURED STONE 309027110


9 mm CLAY IVORY

12"x24" TEXTURED STONE 119027174 24"x48" TEXTURED STONE 309027174







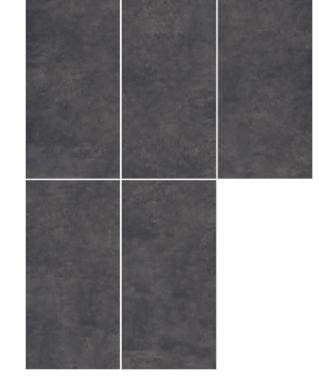















CORE WHITE 12"x24" POLISHED 119067059 24"x48" POLISHED 309067059




















Mosaic available

CROSSOVER













Outdoor available























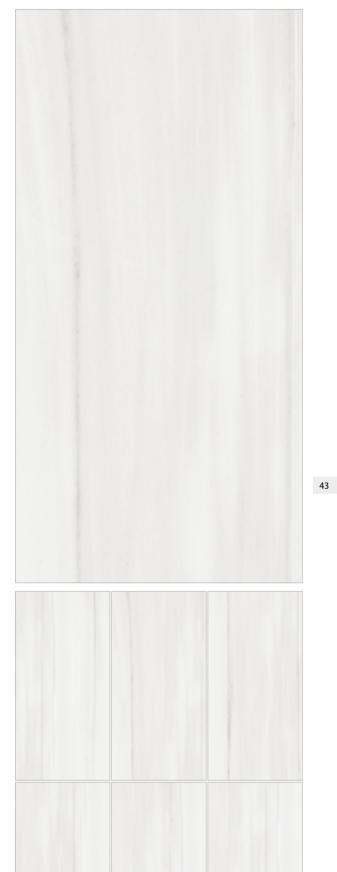

















EPIRO ANTHRACITE

EPIRO GREY


Ø

Ø

V3

24"x48" TEXTURED STONE 309059909



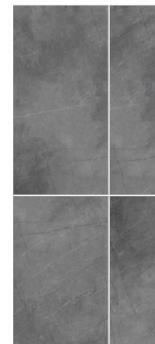













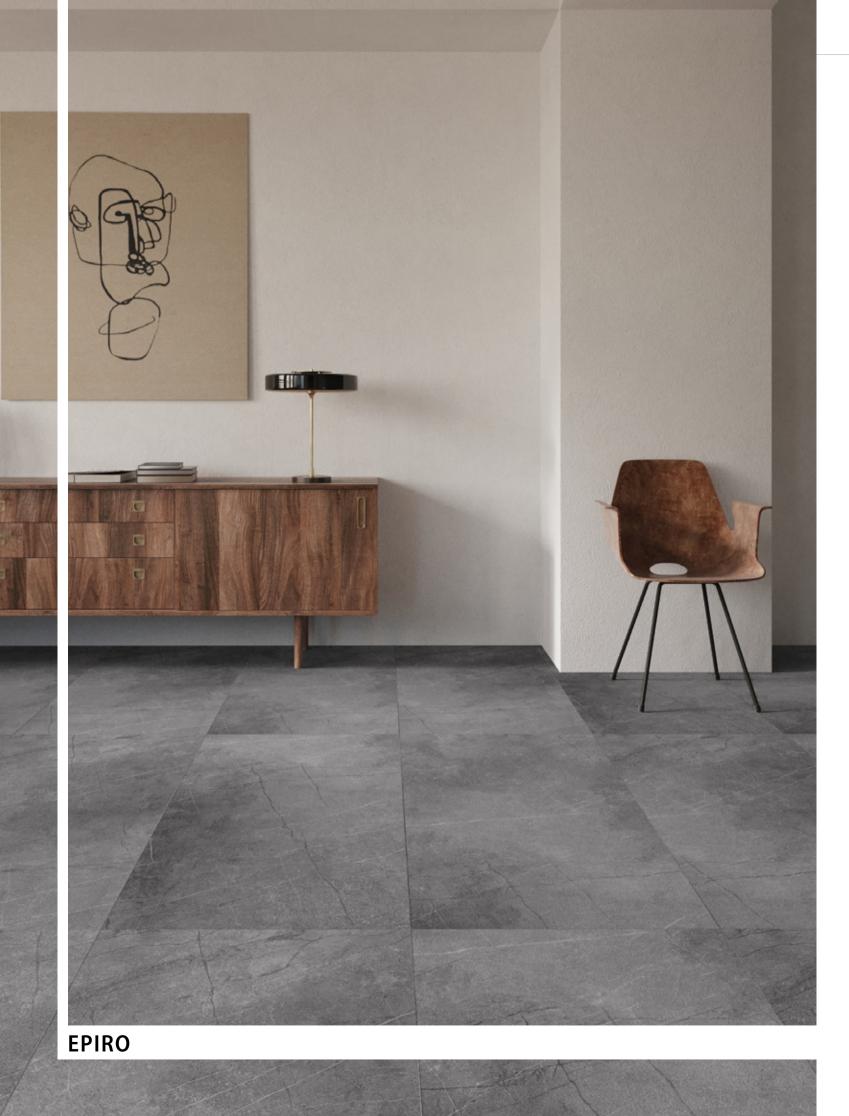





24"x48"

Outdoor available

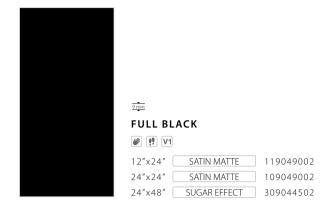

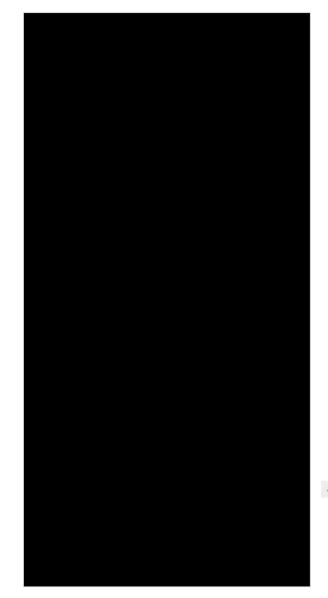

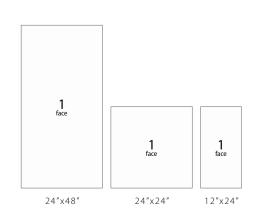

Mosaic available

















FULL WHITE

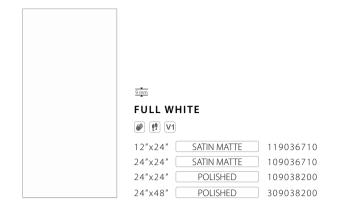

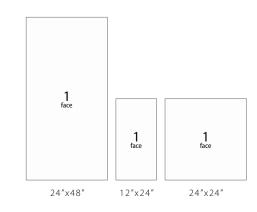

Mosaic available











FULL WHITE








GRIGIO BEIGE

24"x24" TEXTURED STONE 109025414



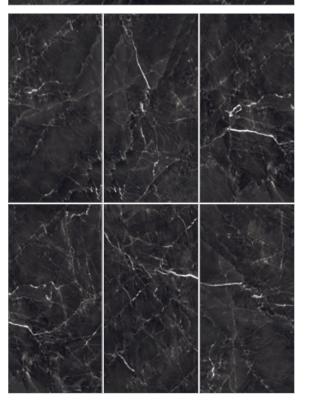

















MARMO METALLO

INDOOR COLLECTION



MARMO METALLO GREY

24"x48" POLISHED 309000909



MARMO METALLO LIGHT GREY

24"x48" POLISHED 309000938



MARMO METALLO

24"x48" POLISHED 309000902



MARMO METALLO

BLUE

24"x48" POLISHED 309000907






MARMO METALLO

















GP SATE OFFICIAL IN THE PROPERTY OF THE PROPER

MIRA DARK GREY

12"x24" SUGAR EFFECT 119036813 24"x48" SUGAR EFFECT 309036813




















Mosaic available



NAMBIA







Mosaic available













ONYX ALAVASTRO BLACK 24"x48" POLISHED 309014202

ONYX ALAVASTRO


















24"x48"



ONYX CASPIAN 24"x48" POLISHED 309005900

24"x24"



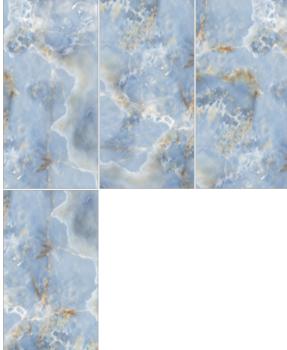















ONYX GOLDEN CLOUD 24"x48" SUGAR EFFECT 309040600

ONYX GOLDEN CLOUD



















24"x48"


8 faces

ONYX MOON



INDOOR COLLECTION

ONYX MOON PEARL 24"x48" POLISHED 309003727

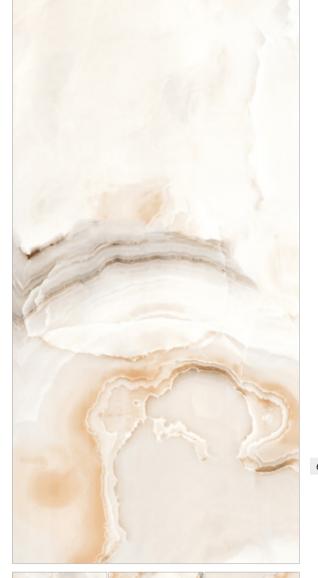














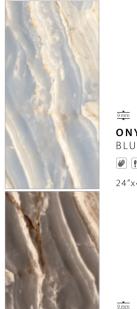


ONYX OPERA BLUE

24"x48" SUGAR EFFECT 309040807

ONYX OPERA ANTHRACITE

24"x48" POLISHED 309005468



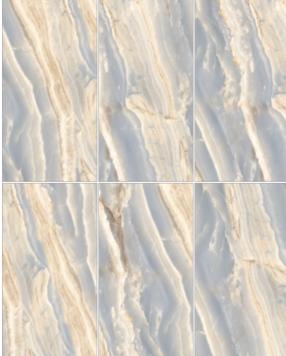













24"x48"

Bookmatch available

ONYX OSTRA



ONYX OSTRA 24"x48" POLISHED 309057574

















ONYX PEARL



INDOOR COLLECTION

onyx pearl 24"x48" POLISHED 309003627

















ONYX PEARL



ONYX SMOKE



INDOOR COLLECTION

ONYX SMOKE BLUE

12"x24" POLISHED 119004307 24"x48" POLISHED 309004307





















12"x24"

INDOOR COLLECTION



ONYX NOVA 24"x48" POLISHED 309015096

















6 faces



9mm ORLANDO WHITE 24"x48" POLISHED 309010710

INDOOR COLLECTION

















13 faces

INDOOR COLLECTION



PANTHEON IVORY

24"x48" TEXTURED MATTE 309051974





3 faces














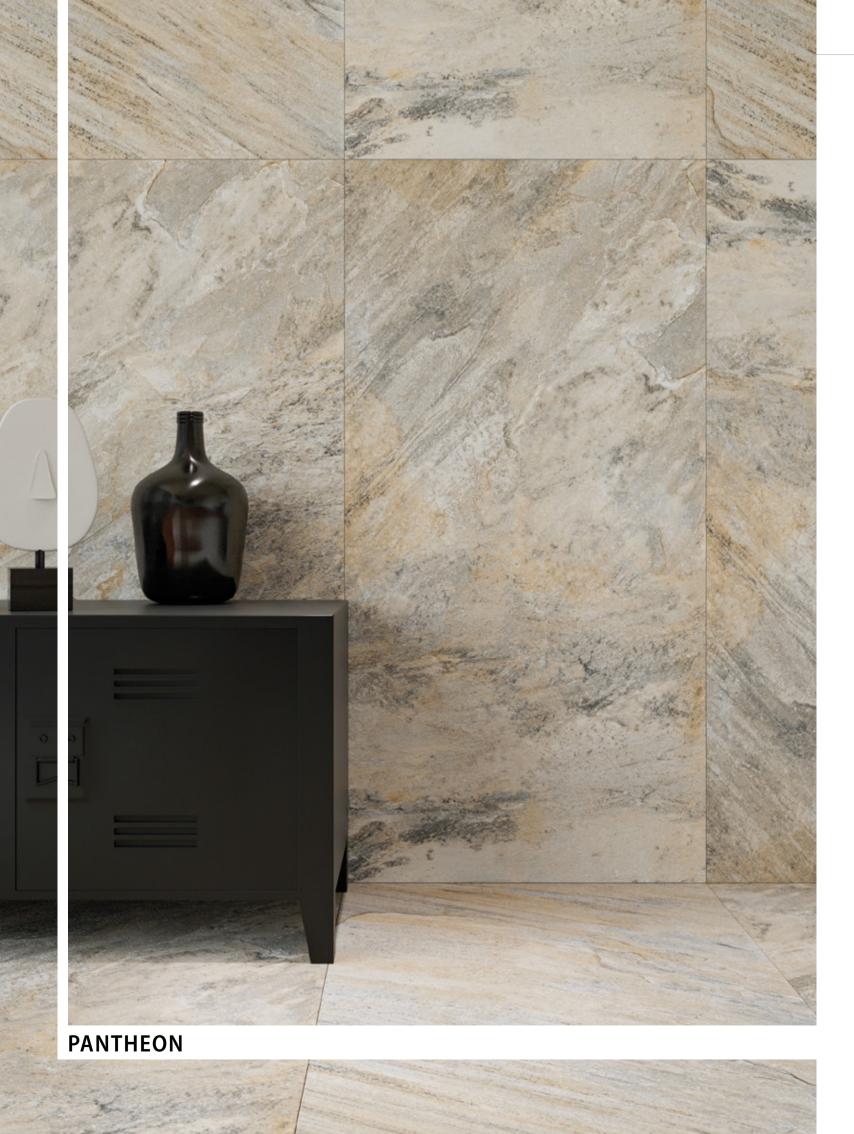





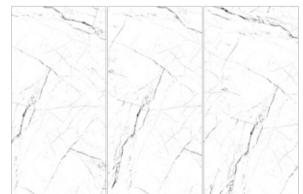



Mosaic available












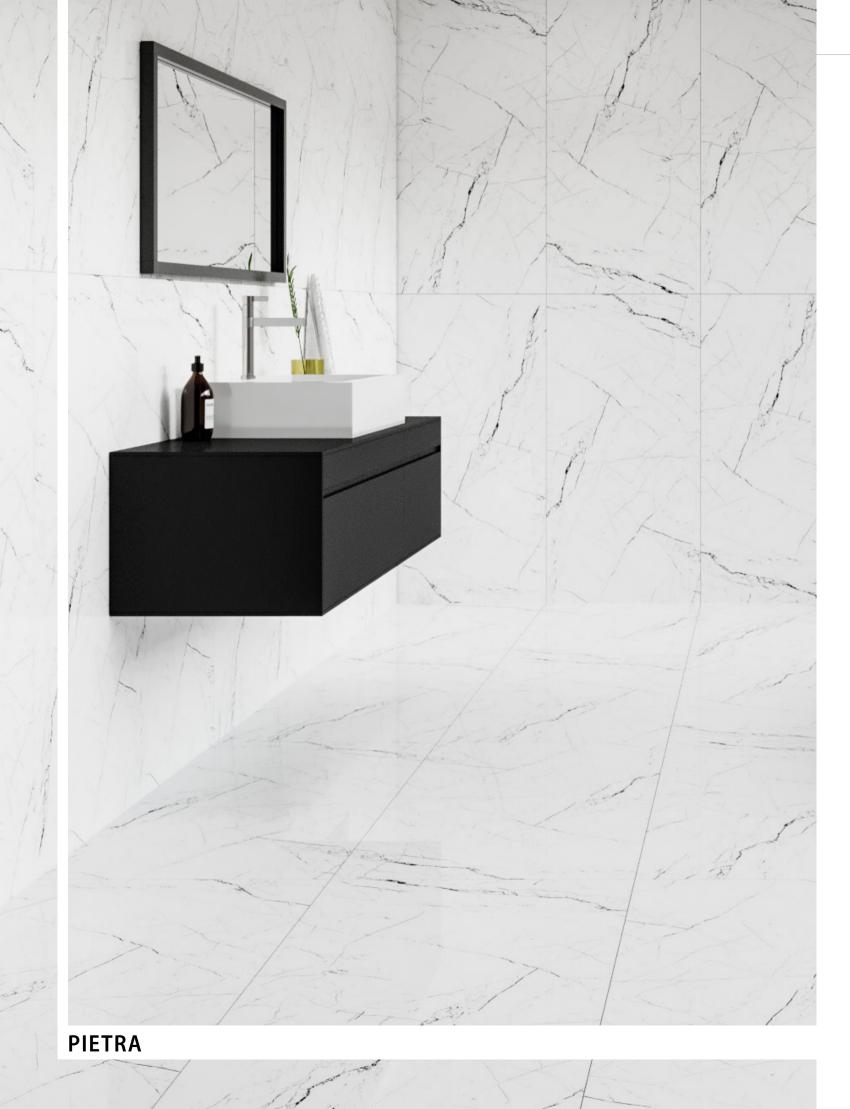

PIETROSA MARBLE



THE STORE

INDOOR COLLECTION

PIETROSA MARBLE 24"x48" SUGAR EFFECT 309054800



24"x48"

Outdoor available
















INDOOR COLLECTION



PIETROSA SAND 24"x48" SUGAR EFFECT 309054858

PIETROSA SAND

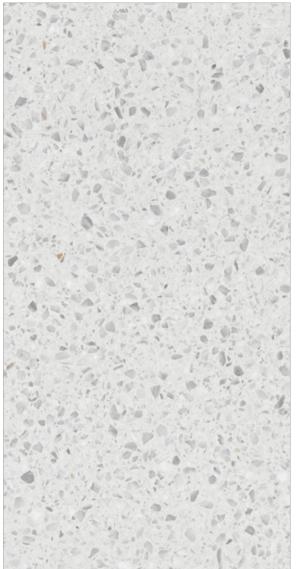



24"x48"

Outdoor available















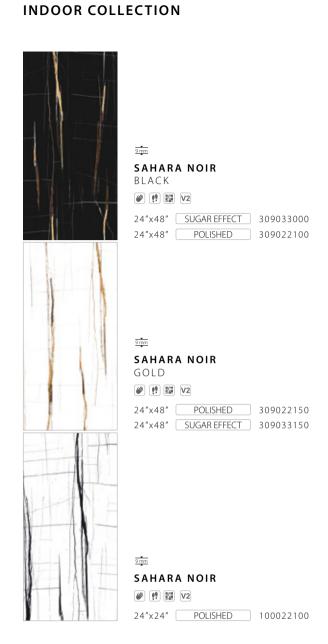



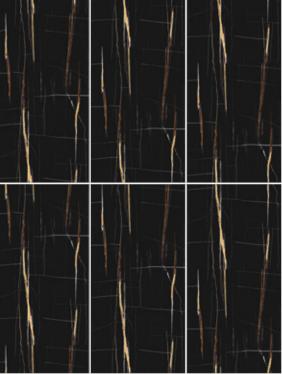












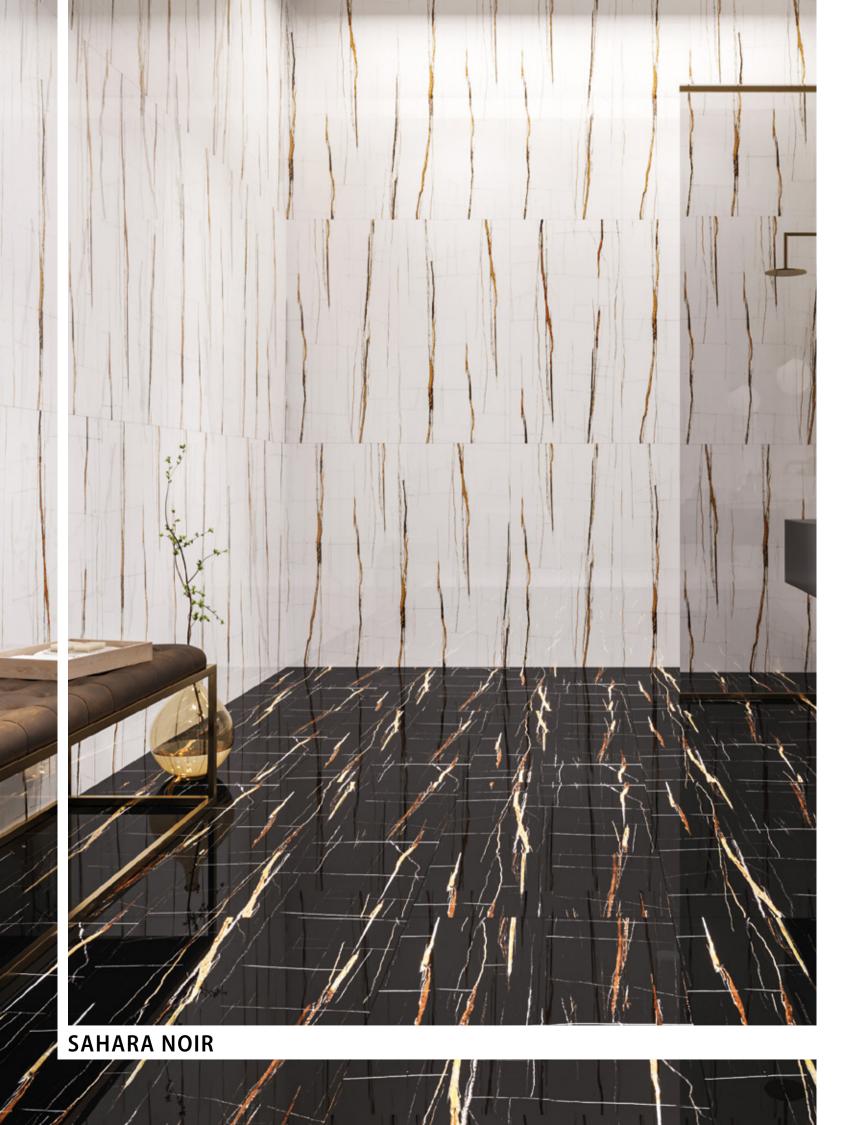

6 faces

12 faces

24"x48" 24"x24"





SCARLET
















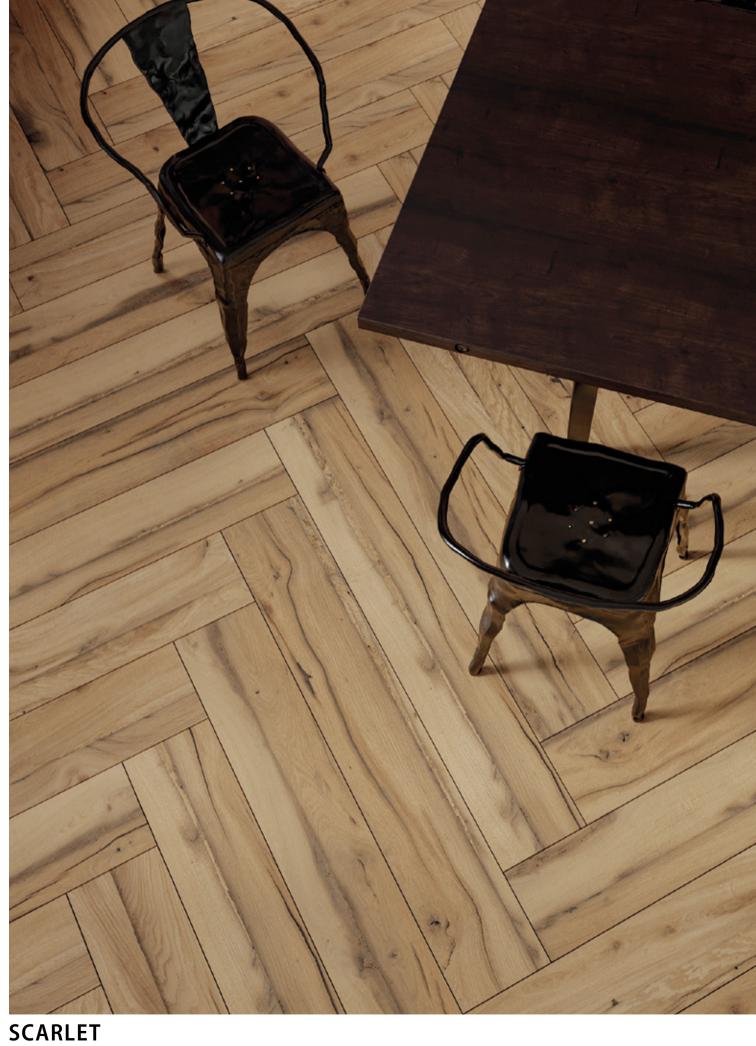

8"x48"

24 faces



INDOOR COLLECTION

SERPEGIANTE



















SOFTWOOD



















SOFTWOOD

27 faces


INDOOR COLLECTION



STATUARIO

12"x24" POLISHED 119002400

12 //2 /	T OLISTIED) 113002100
12"x24"	SATIN MATTE	119019400
24"x48"	POLISHED	309002400
24"x48"	SATIN MATTE	309019400

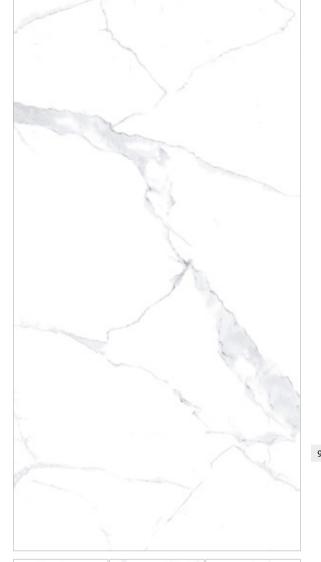










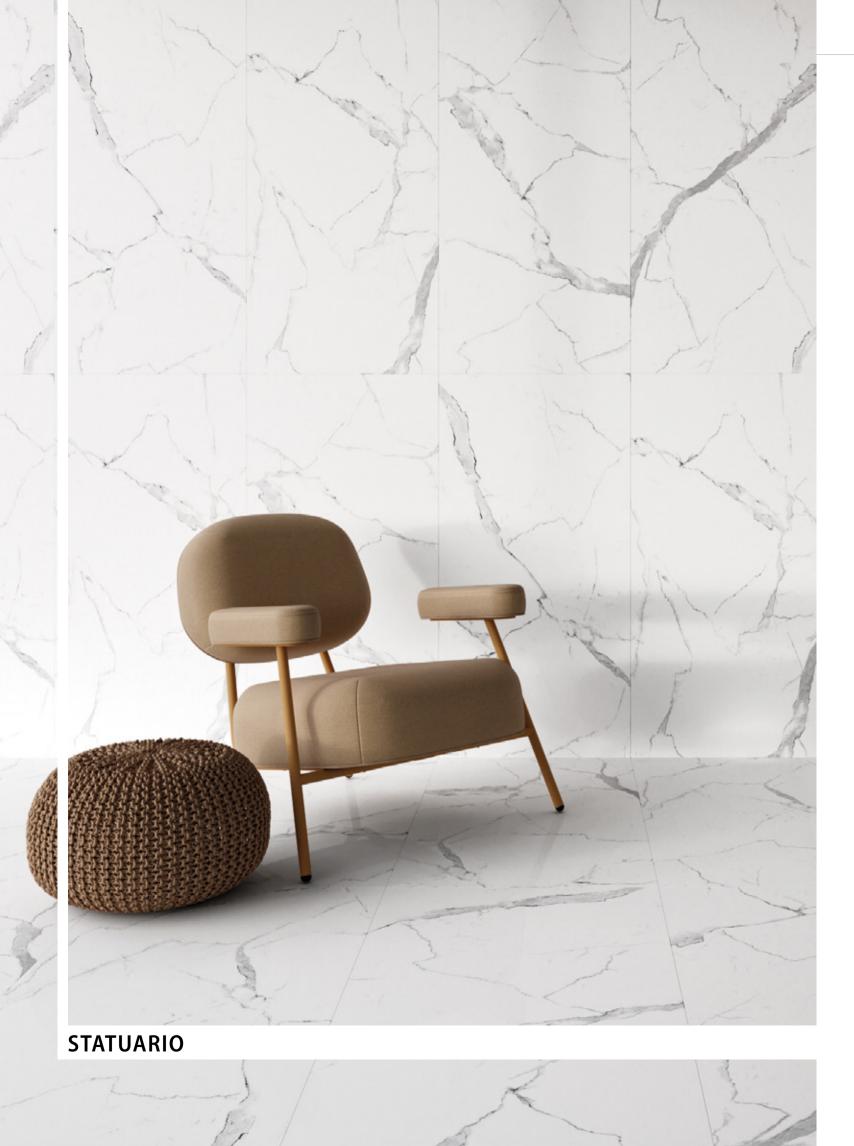


19 faces

24"x48" 12"x24"

INDOOR COLLECTION



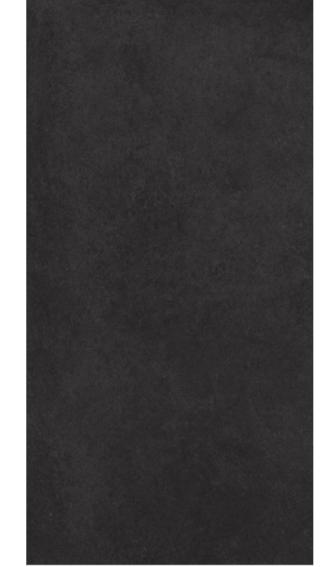



24"x48"














STRATOS






















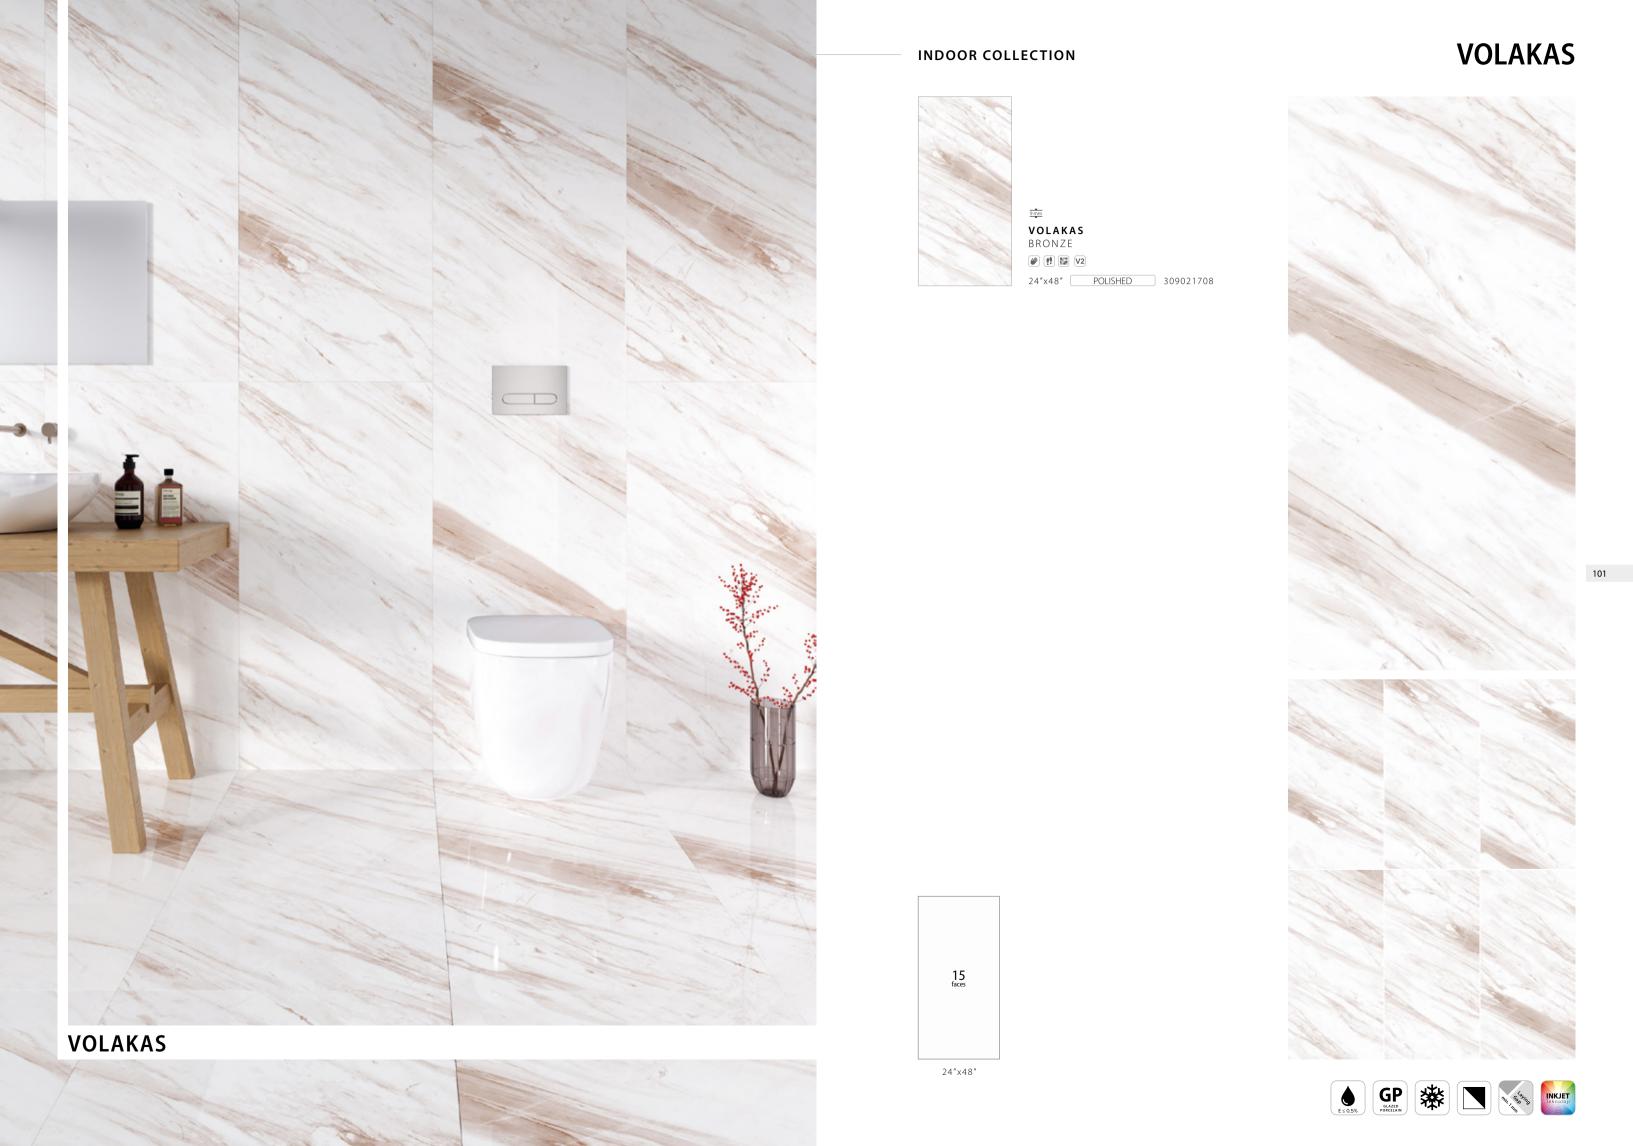






WINDSOR NATURAL Ø

V2

8"x48" TEXTURED WOOD 329053671



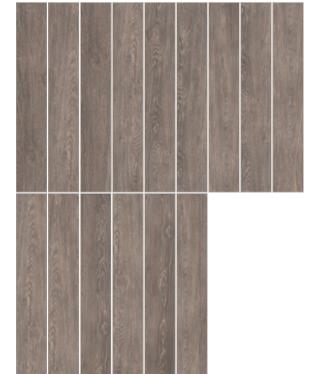














15 faces


MOSAIC collection

MOSAIC CALACATTA (HEXAGON)

CALACATTA HEXAGON WHITE

2"x2" POLISHED 159024410

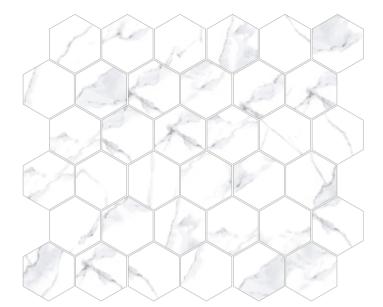

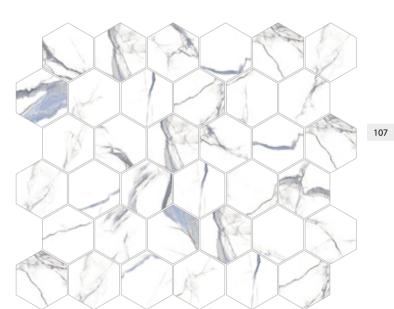



CALACATTA HEXAGON AQUA

2"x2" SATIN MATTE 159014895



MOSAIC CALACATTA (HEXAGON)


















MOSAIC CALACATTA (HEXAGON)

MOSAIC COLLECTION

MOSAIC CALACATTA (HEXAGON)


CALACATTA HEXAGON GOLD

2"x2" POLISHED 159024450 2"x2" SATIN MATTE 159014850

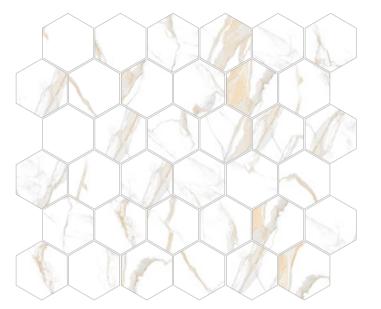

CALACATTA BOLD HEXAGON



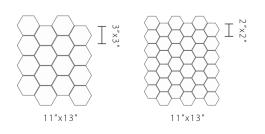












MOSAIC CALACATTA (SQUARE)

CALACATTA SQUARE PEARL


2"x2" SATIN MATTE 159014827

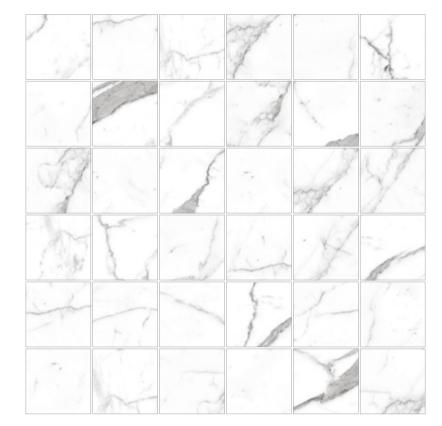

111


















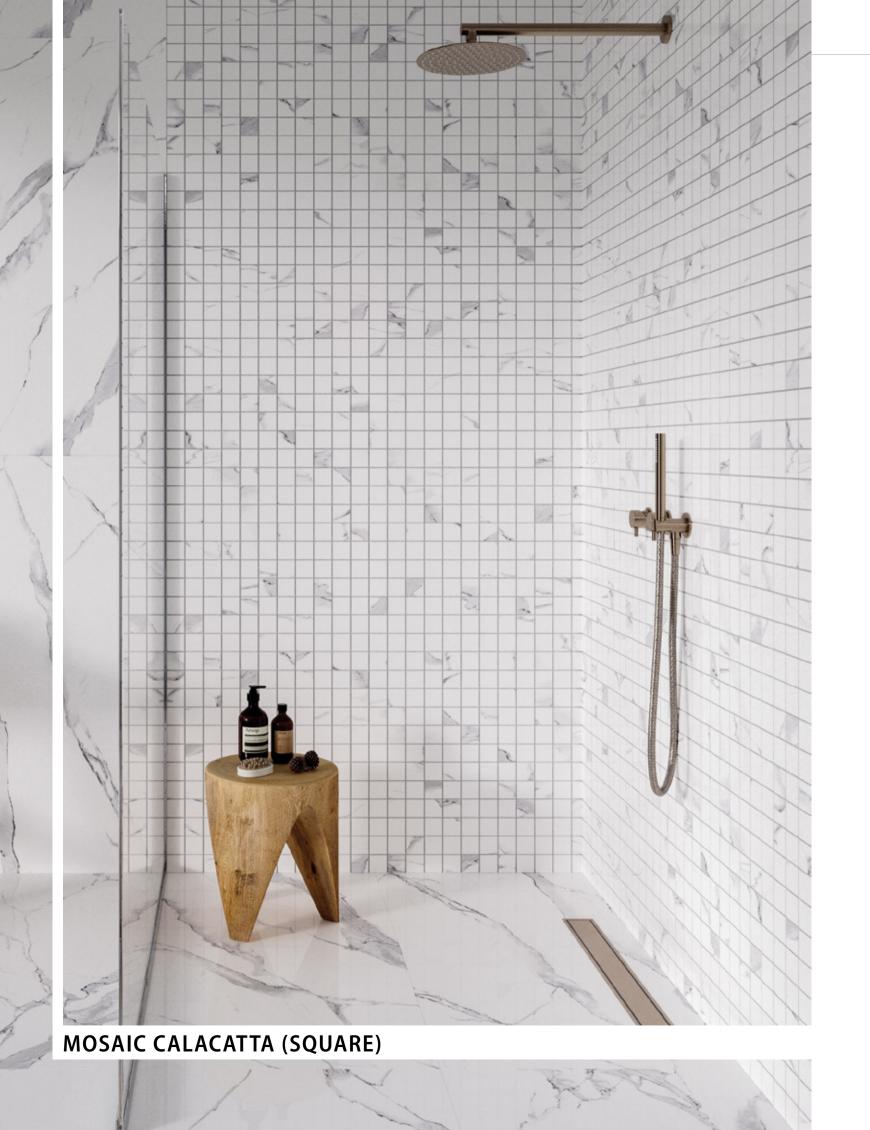

MOSAIC CLAY (SQUARE)



CLAY SQUARE

Ø

V2

2"x2" SATIN MATTE 159024974




CLAY SQUARE GREY


2"x2" TEXTURED STONE 159024909



CLAY SQUARE ANTHRACITE

2"x2" TEXTURED STONE 159024968




















MOSAIC CORE (HEXAGON)

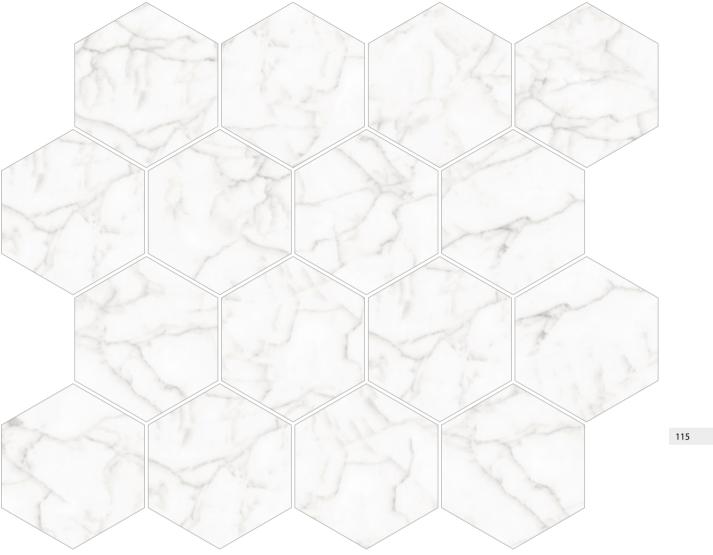


CORE HEXAGON WHITE

Ø

V2

3"x3" POLISHED 159067059

















MOSAIC FULL BLACK (SQUARE)

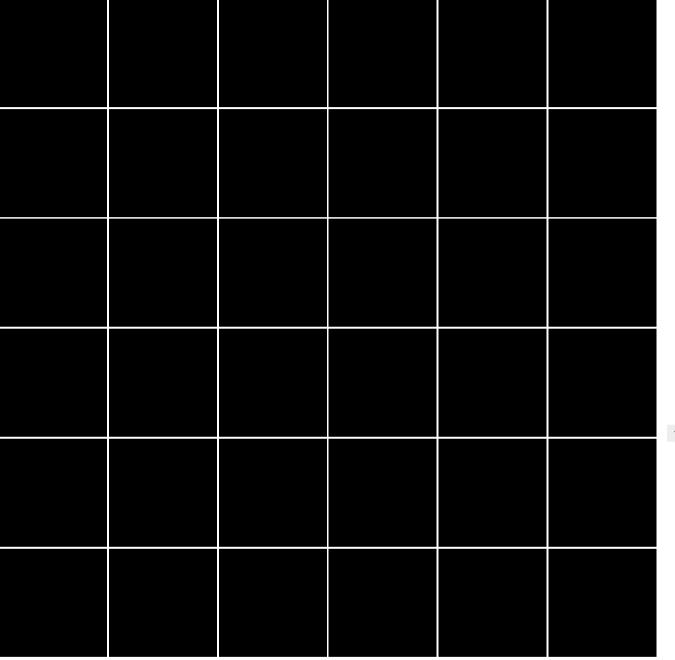

FULL BLACK SQUARE

(*) V1














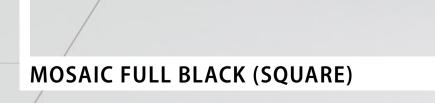


MOSAIC FULL WHITE (SQUARE)



FULL WHITE SQUARE

(*) V1













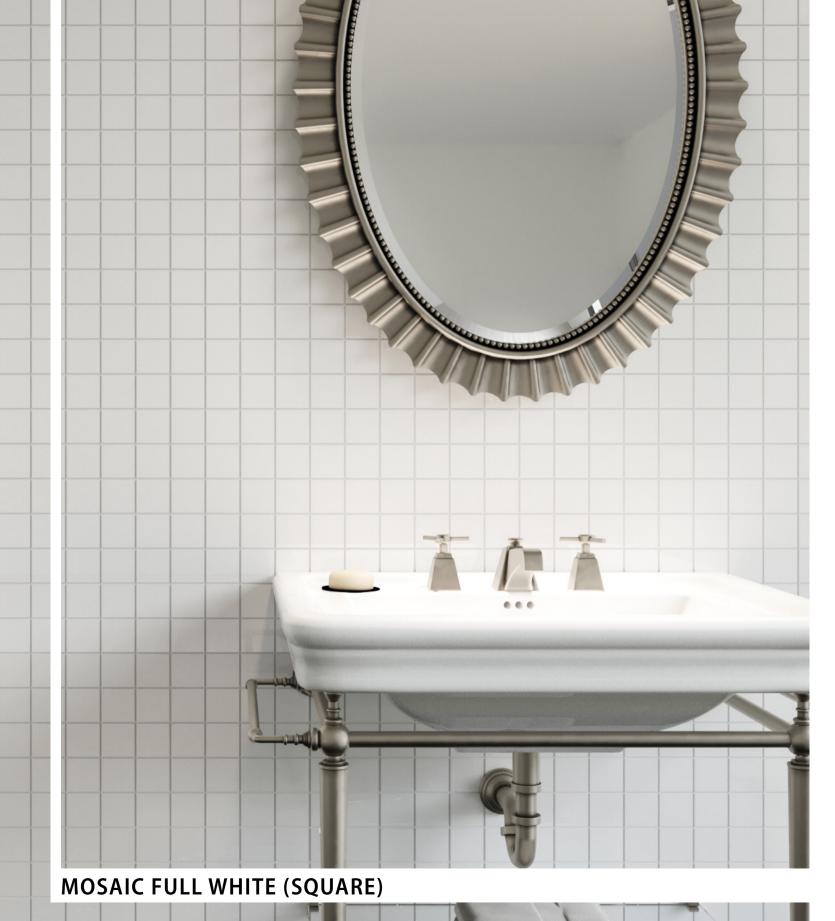

MOSAIC MIRA (SQUARE)



MIRA SQUARE BROWN














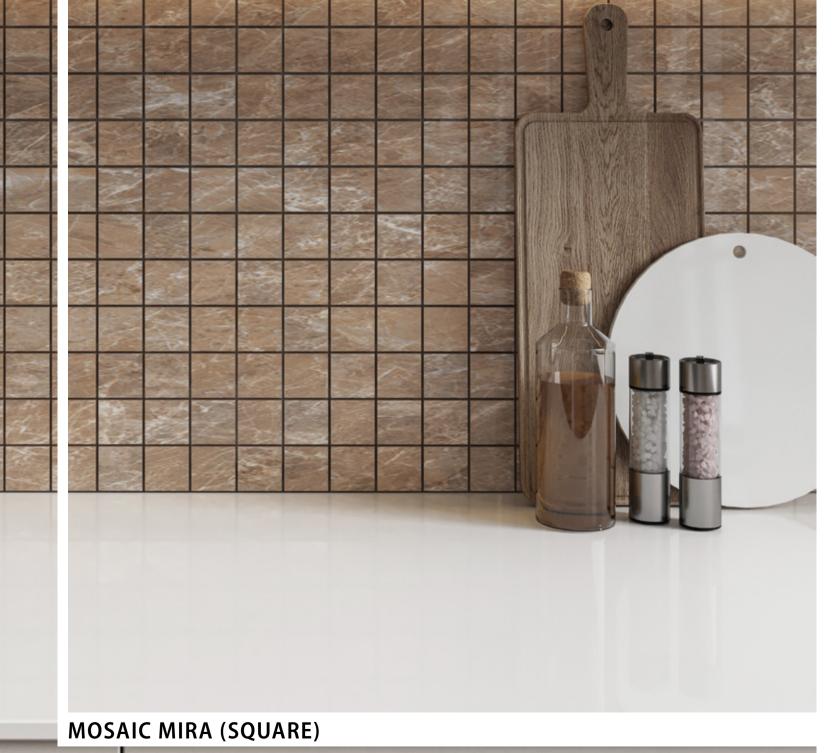

MOSAIC COLLECTION

MOSAIC NAMBIA (SQUARE)



NAMBIA SQUARE GREY


2"x2" SATIN MATTE 159058909



Ø

V2

















MOSAIC PIETRA (SQUARE)

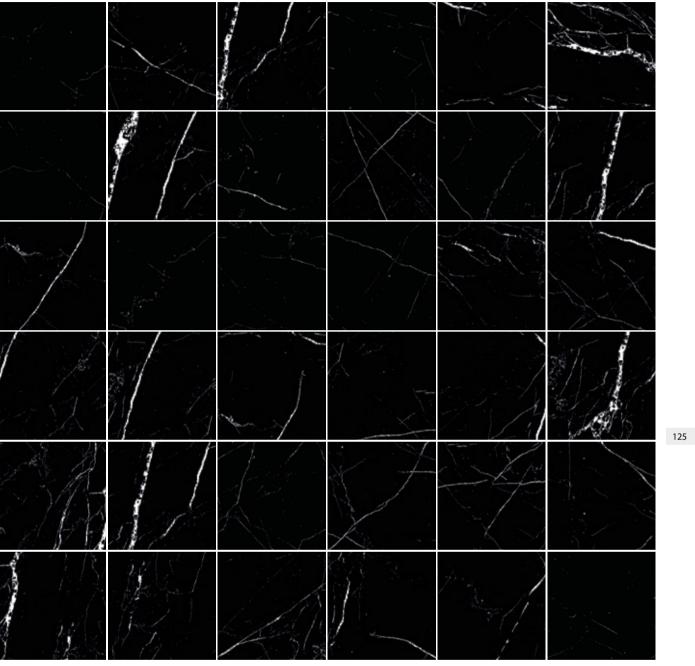

PIETRA SQUARE BLACK

2"x2" POLISHED 159002002














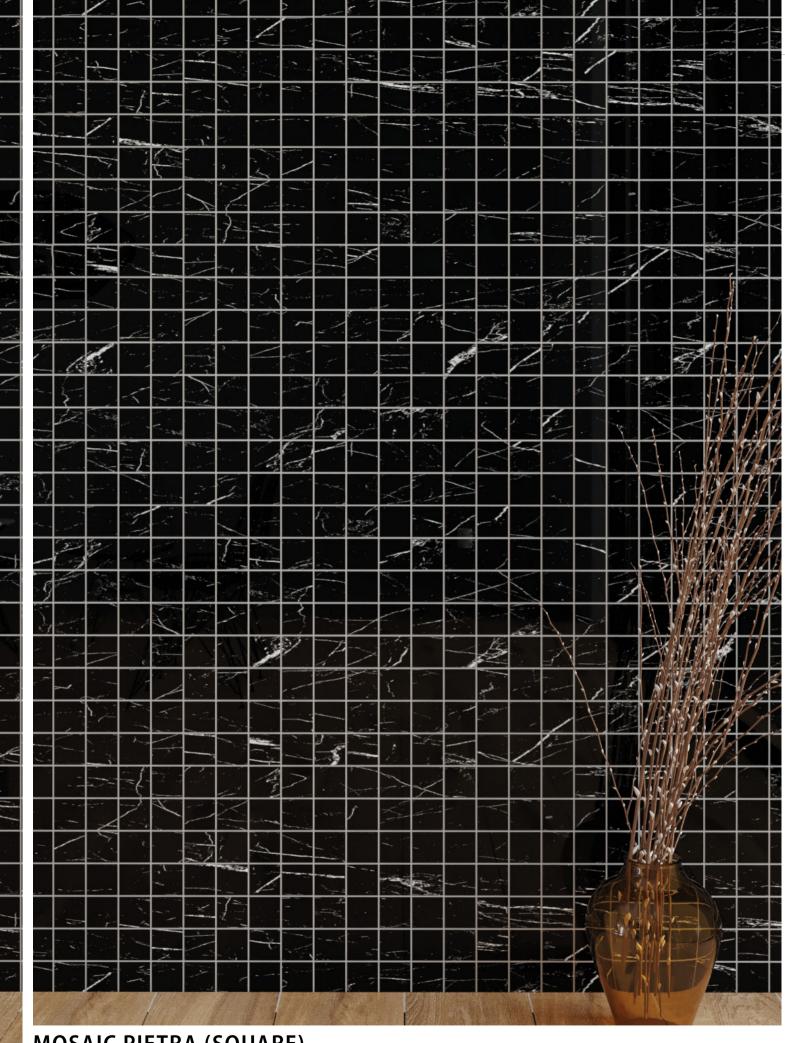

BOOKMATCH collection

CAFFE BOOKMATCH



CAFFE BOOKMATCH MOCHA

24"x48" POLISHED 309010101













CAFFE BOOKMATCH

NEW BIANCO CARRARA BOOKMATCH



24"x48"













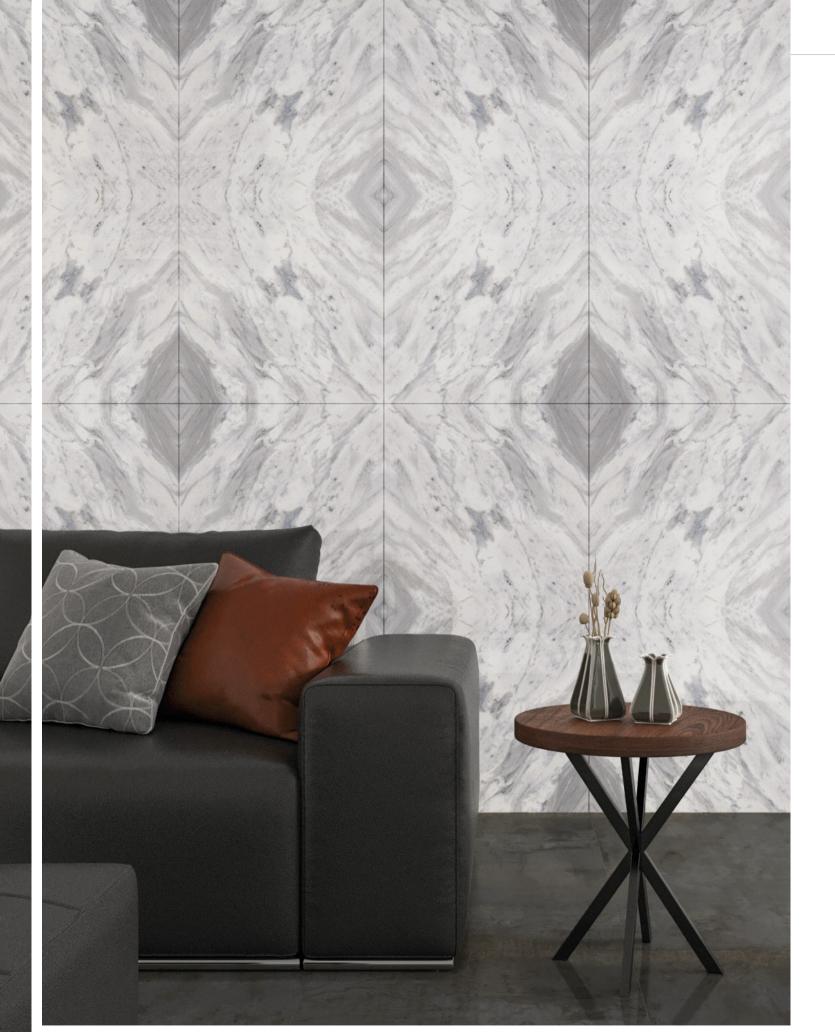

Ø
♥
V1

24"x48" POLISHED 309078759

NEW CALACATTA BOOKMATCH

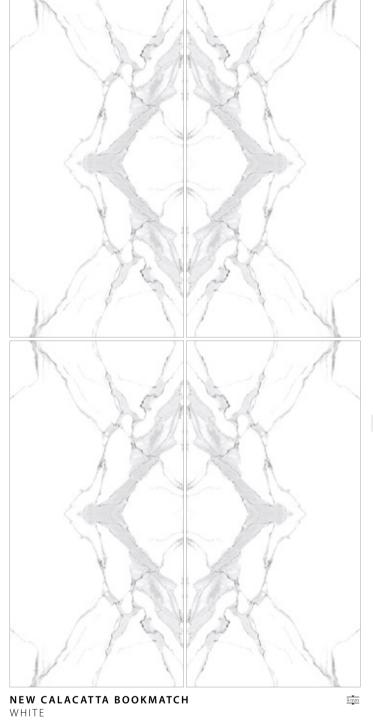

∅ 😲 🖺 V1

24"x48" POLISHED 309078910

24"x48"

Outdoor available













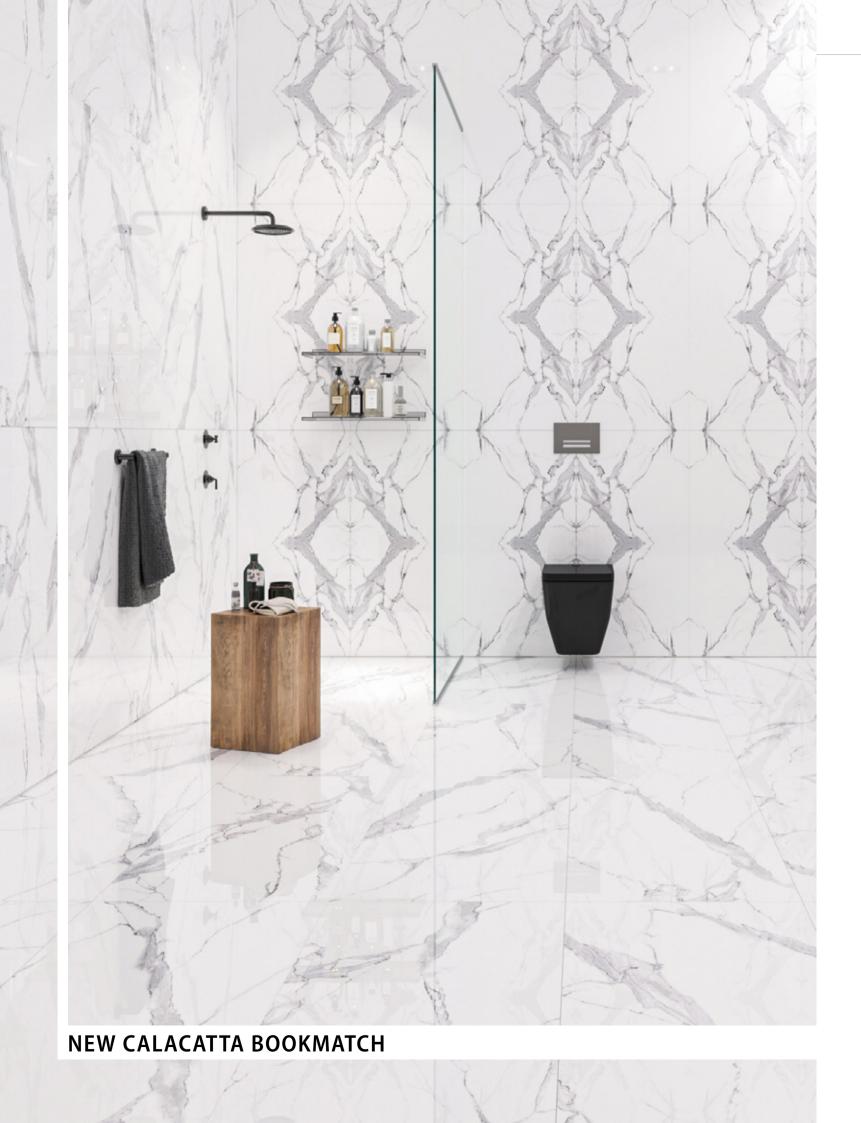

NEW ICELAND BOOKMATCH

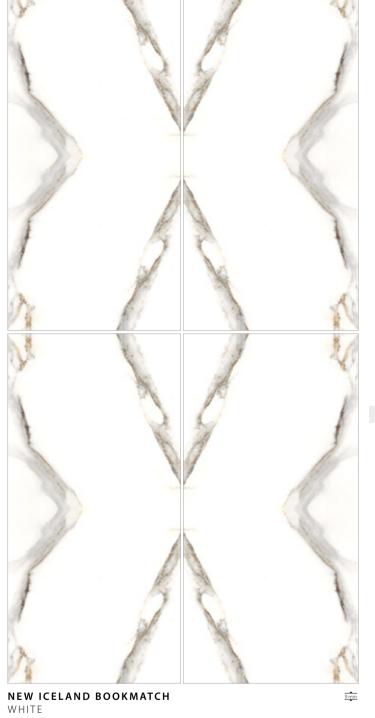

Ø

V1

24"x48" POLISHED 309079310

NEW ICELAND BOOKMATCH











NEW ONYX LOTUS BOOKMATCH



Ø (!) ₩ V1

24"x48" POLISHED 309079700



















BOOKMATCH COLLECTION

NEW ONYX OPERA BOOKMATCH

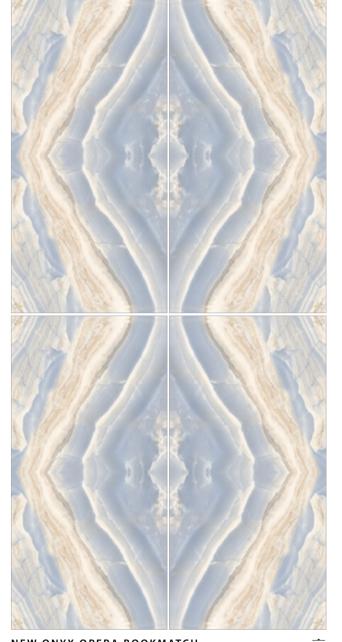



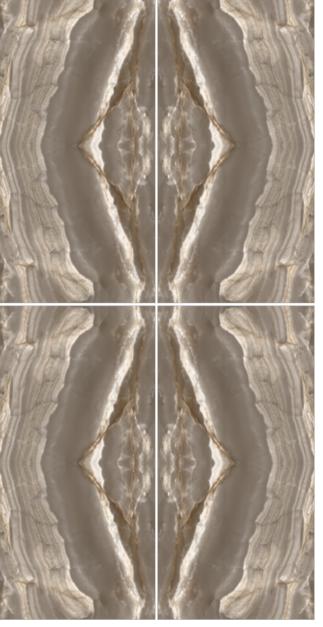

NEW ONYX OPERA BOOKMATCH ANTHRACITE Ø (!) ₩ V1 24"x48" POLISHED 309079468

24"x48"













NEW ONYX PERLA BOOKMATCH



NEW ONYX PERLA BOOKMATCH

Ø (!) ₩ V1

24"x48" POLISHED 309079800













NEW ZENITH BOOKMATCH



24"x48" POLISHED 309079607













DECOVITA TEST POLICY

We are making tests both in our factory laboratory and 3th party laboratories to exceed standards.

3th Party Laboratories: We have adopted testing of both **ASTM** (American Society for Testing and Materials Standards) by **TCNA** (Tile Council of North America) and EN ISO (European Union International Standards).

WATER ABSORPTION ASTM C373

This test method covers procedures for determining water absorption, bulk density, apparent porosity, and apparent specific gravity of non-tile fired unglazed white ware products, glazed or unglazed ceramic tiles, and glass tiles. The water absorption, reported here, is expressed as a percent, the relationship of the mass of water absorbed to the mass of the dry specimen.

Class	Requirement
Impervious	Water absorption less than or equal to 0.5%
Vitreous	Water absorption more than 0.5% and less than or equal to 3.0%
Semi-vitreous	Water absorption more than 3.0% and less than or equal to 7.0%
Non-vitreous	Water absorption more than 7.0% and less than or equal to 20.0%

CHEMICAL RESISTANCE ASTM C650

This test method covers a procedure for determining whether, and to what degree, ceramic tiles are affected by prolonged exposure to chemical substances that are commonly in the household or for cleaning purposes as well as other more severe conditions. This test method calls for one or more tests, each consisting of exposing flat pieces of ceramic tile to the action of a specific chemical substance for a definite period of time at a prescribed temperature.

Class	Maximum number of affected samples	
Class A	0	
Class B	1	
Class C	2	
Class D	3	
Class F	4 or more	

BREAKING STRENGTH ASTM C648

This test method covers the determination of the breaking strength of glazed ceramic wall tile, ceramic mosaic tile, quarry tile, and paver tile. The test method consists of supporting the tile on the ends of three cylindrical rods, or on three ball bearings arranged in an equilateral triangle, and applying force at a definite rate to the center of the tile, until the specimen breaks.

ANSI Standard	Tile Type	Specification
ANSI A 137.1 (Ceramic Tile)	Porcelain Tile	The average breaking strength shall be 275 lbf or greater with no individual specimen below 250 lbf

ABRASION RESISTANCE (PEI) ASTM C1027

This test method is designed to measure the resistance of tile surfaces to visible surface abrasion. Certain irregular surfaces may not be evaluated properly by this test method because of wear patterns. The abrasion resistance of tile surfaces is determined by rotation of an abrasive load on the surface and the assessment of the resultant wear by means of visual comparison of the abraded test specimens and non-abraded tiles.

Class	Explanation
Class 0	Not suitable for floors. (Defects detected after 100 Revolutions)
Class 1	Residential, light traffic. (Defects detected after 150 Revolutions)
Class 2	Residential, medium to light traffic. (Defects detected after 600 Revolutions)
Class 3	Residential, heavy traffic. Commercial, light traffic. (Defects detected after 750, 1500 Revolutions)
Class 4	Commercial, considerable traffic. (Defects detected after 21000, 6000, 12000 Revolutions)
Class 5	Commercial, heavy traffic. (Defects detected after > 12000 Revolutions)

44 STAIN RESISTANCE ASTM C1378

This test method is intended to determine the resistance to staining of ceramic tile surfaces. The resistance to staining is determined by maintaining test solutions in contact with ceramic tile surfaces for a specified period of time. After exposure, the surface is cleaned in a defined manner, and the test specimens are inspected visually for change.

Class	Maximum number of samples that retain a stain	
Class A Class B Class C	0	
Class B	1	
Class C	2	
Class D Class E	3	
Class E	4 or more	

SCRATCH HARDNESS (MOHS HARDNESS SCALE) ASTM C1895

This method covers the procedures to determine the Mohs scratch hardness of ceramic tile. The resistance to scratching is determined based on a visual observation of the ceramic tile surface after an attempt to scratch the surface using a pick of known hardness. The following minerals are used as standard: 1. Talc, 2. Gypsum, 3. Calcite, 4. Fluorite, 5. Apatite, 6. Feldspar, 7. Quartz, 8. Topaz, 9. Corundum, 10. Diamond

DIMENSIONS AND SURFACE QUALITY ASTM C485

This test method provides a means for determining whether or not a lot of ceramic tile meets the warpage requirements that may appear in specifications to assure satisfactory tile installations. In accordance with this test method, warpage is calculated as a percentage of the length of the edge or diagonal being tested. It is realized that the percentage values based on the overall edge length, or on the overall diagonal length of a tile will be slightly lower than those based on the distance between reference points. However, the ratio of the overall lengths to the distance between reference points will be practically constant for any particular size of tile and, therefore, the percentage values will be comparable and equally indicative of warpage.

DYNAMIC COEFFICIENT OF FRICTION OF HARD SURFACE FLOORING MATERIALS - DCOF - ANSI A326.3

Unless otherwise specified, hard surface flooring materials suitable for level interior spaces expected to be walked upon when wet with water shall have a wet DCOF of 0.42 or greater when tested using SBR sensor material and SLS solution as per this standard. However, hard surface flooring materials with a DCOF of 0.42 or greater are not necessarily suitable for all projects.

The specifier shall determine materials appropriate for specific project conditions, considering by way of example, but not in limitation, type of use, traffic, expected contaminants, expected maintenance, expected wear, and manufacturers' guidelines and recommendations. No floor tile is "slip proof". Porcelain tiles shouldn't be used in areas where oil, grease, or water is expected on the floor both indoors or out.

Slip Hazard	Minimum DCOF BOT3000 AcuTest (Wet)
Dry & Level Interior	Any
Wet & Level Interior	≥ 0.42
Exterior Applications, Oils, Pool Decking & Other Wet Areas with minimal footwear	≥ 0.60
Ramps & Inclines	≥ 0.65

RESISTANCE OF CERAMIC AND GLASS TILE TO FREEZE - THAW CYCLING ASTM C1026

This test method describes the procedures and equipment required to test either glazed or unglazed ceramic or glass tiles for resistance to repeated cycles of freezing and thawing. Tile of any size or shape may be tested by this test method. A designated test load of tile specimens is saturated with water prior to being placed face-up in a metal water-filled container inside a freezer. The water level is adjusted such that the tile specimens are partially submerged. A thermocouple is inserted into the bottom of the metal container such that the water surrounding the thermocouple is the last location to freeze and thaw. Freezing is followed by a thawing cycle using water that flows over the test load. The number of freeze-thaw cycles is recorded and after 300 cycles, the test load is visually examined for damage and checked for total weight loss.

SHADE VARIATIONS

Variation in coloring is classified by the following.

Class	Explanation
VO	Very uniform, monochromatic color
V1	Consistent color within each tile and from tile to tile
V2	Color variation within each tile
V3	Some variation from tile to tile and within each tile
V4	Considerable variation from tile to tile

DECOVITA DECLARED VALUES

DECOVITA FACTORY QUALITY CONTROL DEPARTMENT REGULARLY MAKES BELOW TESTS IN OUR FACTORY LABORATORY

- Dimensions and Surface Quality
- Water Absorption %
- Pallet and Box Control
- Resistance to Low Concentration of Acids and Alkalis
 Resistance to High Concentration of Acids and Alkalis
- Resistance to Household Chemicals and Swimming Pool Salts
- Resistance to Staining
- Surface Brightness Check
- Scratch Hardness (Mohs)

DECOVITA INDOOR 1 CM (POLISHED AND MATT)

Method	Declared Value
The ASTM C373 Water Absorption	≤ 0.5 %
The ASTM C648 Breaking Strength	≥ 500 lbf
The ASTM C650 Chemical Resistance	Resistant
The ASTM C1027 Surface Abrasion (PEI)	Min Class 4
The ASTM C1378 Stain Resistance	Min Class B
ASTM 1895 Mohs Scratch Hardness	Min 6
Length and width	± 0,5 mm
Thickness	± 0,5 mm
Straightness of Sides	± 0.5 mm
Rectangularity	± % 0,5
Center-Edge Curvature-Warpage	± % 0,5
Surface Quality	% 95

^{*}ANSI A326.3 Dynamic Coefficient of Friction (DCOF – wet only) for Textured Matte Indoor 1 cm≥ 0.65

DECOVITA INDOOR 1 CM (SUGAR EFFECT)

Method	Declared Value
The ASTM C373 Water Absorption	≤ 0.5 %
The ASTM C648 Breaking Strength	≥ 500 lbf
The ASTM C650 Chemical Resistance	Resistant
The ASTM C1027 Surface Abrasion (PEI)	Min Class 3
The ASTM C1378 Stain Resistance	Min Class B
ASTM 1895 Mohs Scratch Hardness	Min 7
Length and width	± 0,5 mm
Thickness	± 0,5 mm
Straightness of Sides	± 0.5 mm
Rectangularity	± % 0,5
Center-Edge Curvature-Warpage	± % 0,5
Surface Quality	% 95



145

^{*}ANSI A326.3 Dynamic Coefficient of Friction (DCOF – wet only) for Satin Matte Indoor 1 cm ≥ 0.44

ASTM 1895 Mohs Scratch Hardness for Sugar Effect Indoor 1cm is 8.

BOX / PALLET DETAILS

NOMINAL THICKNESS				PCS	вох		BOX PER	PALLET		PALLET SIZE		WEIGHT OF LOADED PALLET	
mm	inch	cm	inch	/ BOX	m²	sqf	PALLET	m²	sqf	cm	inch	kg	lb
9	3/8"	30x60	12x24	9	1.62	17.43	32	51,84	558	80x120x75	32x48x29	1,030	2,270
10	3/8"	30x60	12x24	8	1.44	15.50	32	46,08	496	80x120x75	32x48x29	990	2,182
11	3/8"	30x60	12x24	7	1.26	13.56	32	40,32	434	80x120x75	32x48x29	950	2,094
9	3/8"	60x60	24x24	4	1.44	15.50	32	46,08	496	80x120x75	32x48x29	950	2,094
10	3/8"	60x60	24x24	4	1.44	15.50	30	43,2	464.83	80x120x75	32x48x29	980	2,160
9	3/8"	60x120	24x48	2	1.44	15.50	36	51,84	558	95x128x75	36x50x29	1,040	2,292
11	3/8"	60x120	24x48	2	1.44	15.50	32	46,08	496	93x128x75	36x50x29	1,180	2,601
9	3/8"	30x120	12x48	5	1.80	19.37	36	64,8	697.50	93x128x80	36x50x32	1,600	3,527
11	3/8"	30x120	12x48	4	1.44	15.49	36	51,84	558	93x128x80	36x50x32	1,350	2,976
9	3/8"	20x120	8x48	7	1.68	18.08	36	60,48	651	93x128x80	36x50x32	1,600	3,527
11	3/8"	20x120	8x48	6	1.44	15.50	36	51,84	558	93x128x80	36x50x32	1,400	3,086
11	3/8"	80x160	32x64	1	1.28	13.77	34	43,52	468.44	96x177x75	37x69x32	1.160	2,557
11	3/8"	90x180	36x72	1	1.62	17.43	34	55,08	592.87	106x197x75	41x77x29	1,450	3,196
9	3/8"	80x80	32x32	2	1.28	13.77	46	58,88	633.77	80x120x75	32x48x29	1,200	2,645
11	3/8"	80x80	32x32	2	1.28	13.77	42	53,76	578.66	80x120x75	32x48x29	1,300	2,866
20	3/4"	60x60	24x24	2	0.72	7.75	30	21,6	232.50	80x120x75	32x48x29	1,150	2,535
20	3/4"	60x120	24x48	1	0.72	7.75	32	23,04	248	93x128x75	36x50x29	1,250	2,755
20	3/4"	30x60	12x24	4	0.72	7.75	32	23,04	248	80x120x75	32x48x29	1,220	2,689
20	3/4"	30x30	12x12	4	0.36	3.87	64	23,04	248	80x120x75	32x48x29	1,220	2,689

MOSAICS

ТҮРЕ	SIZE	PCS	ВС	X	BOX PER	PAL	LET	WEIGT O	F BOX		OF LOADED LLET
		/ BOX	m²	sqf	PALLET	m²	sqf	kg	lb	kg	lb
Square	2x2	5	0.45	4.84	90	40.50	435.90	9.50	21	870	1.914
Square	3x3	5	0.45	4.84	90	40.50	435.90	9.50	21	870	1.914
Hexagon	2x2	5	0.46	4.97	90	41.40	445.60	9.50	21	870	1.914
Hexagon	3x3	5	0.51	5.49	90	45.90	494.10	9.50	21	870	1.914



DISCLAIMER POLICY

Porcelain Ceramic Tile is subject to standard variances resulting from the manufacturing process. Decovita provides warranty that the products are within the industry standard variance levels. Colors in print will not appear exact, photos are not to scale.

Decovita-USA, INC. warrants that our products will meet or exceed the testing requirements published in our current product catalogs / literature. We also warrant our tile to conform to any specific physical properties stated in our product catalogs / literature and to be free from manufactures defects for a period of one year from date of purchase.

Sample Policy

Product samples may not be an exact match to supplied materials due to variations in batch manufacturing. A sample product is merely a representation of a product. This means the supplied materials may have slight differences in color, shade, and/or surface appearance.

Installation Warning

INSTALLATION of the materials constitutes ACCEPTANCE of products. Therefore, all supplied materials must be inspected by the Customer/Buyer/End User/Installer prior to installation to determine if the supplied materials are acceptable (e.g. proper series, color, shade, texture, glaze, surface finish, etc). If there is any question as to the material's appropriateness, the material must NOT be installed. If marks or discolorations of any type are found on the surface of a tile, the tile piece must NOT be installed unless the marks or discoloration are first removed to the satisfaction of the Customer/Buyer/End User/Installer. Decovita will not be held liable for replacement costs for tiles installed with such issues.

Returns

A return cannot be accepted without purchase invoice and without manager approval for full box quantities only.

Any orders purchased within 30 days, there will not be restocking fee unless packaging is damaged and not in sellable condition upon manager approval, however after 30 days any returns will be subject to a 30% restocking fee. After 60 days no returns will be accepted. Payment made by credit card will go back to the same card used within 7 business days. The Credit Card Processing fee is 2.9% and the ACH Processing fee is 1%. Payment made by check or cash will be refunded by corporate refund check within 14 business days to the same company name and address we have on file. All products return under this warranty require a Return Authorization (RA) Number. Contact Decovita USA Virginia at 571.926.8326 or Decovita USA California at 714.406.1500 for an RA Number and other important details.

Items must be in their original packaging and full box quantities only. Any special order (customized product, transfer request of product from Turkey, transfer request of product from one Decoyita USA warehouse to another Decoyita USA warehouse) is out of return policy, so no returns will be accepted!

Purchasing Terms & Conditions

Each shipment of products by the Seller shall be governed by these terms and conditions notwithstanding any other specific Terms & Conditions of our Manufacturers.

Product and Prices

Unless agreed to otherwise, in advance, in writing and signed by an officer of Decovita, all offered prices are F.O.T. Decovita's facility. All pricing quotes must be documented in writing and issued by Decovita to be valid. Unless otherwise stated, prices quoted are firm for 30 days from the date quoted. Decovita reserves the right to change its prices and the specifications of its products at any time without notice. Prices do not include state, local, federal or other taxes and duties, and the same will be additionally charged unless a valid tax exemption or resale certificate is furnished to Decovita prior to shipping. State and local taxes, when charged, are assessed based on those rates in effect at the Decovita location selling or servicing the Buyer. All state, local, federal or other taxes and duties are the responsibility of the Buyer. Decovita's failure to assess or collect adequate taxes at the time of sale does not relieve Buyer of the responsibility for actual tax liabilities. Product pricing is subject to change without prior notice.

Transfer of Title/Risk of Loss

Delivery by Decovita to the initial common carrier shall constitute delivery to the Customer/Buyer. Decovita's responsibility ceases upon delivery to the common carrier and all goods are shipped at Customer/Buyer's risk.

Indemnification

Buyer shall at its own expense apply for and obtain any permits and inspections required for the installation and/or use of Decovita's products. Decovita makes no promise or representation that the products will conform to any federal, state or local laws, ordinances, regulations, codes or standards. Decovita shall not be responsible for any losses or damages sustained by the Buyer, or any other person, as a result of improper installation or misapplication of Decovita's products. Buyer shall indemnify and hold harmless Decovita and its agents and employees against any loss, damage, claim, suit, liability, judgment or expense (including, without limitation, attorney's fees) arising out of, or in connection with, any injury, damage to or loss of any property, or violation of any applicable laws or regulations resulting from, or in connection with, the sale, transportation, installation, use, or repair of Decovita's products by the Buyer.

MAP Policy

Decovita USA is focused on maintaining sustainable margins for our RESELLERS/DEALERS/DISTRIBUTION network. In recognition of the investment in time and resources required for our high-quality RESELLERS/DEALERS/DISTRIBUTION network to provide the level of customer service and product knowledge expected from our customers, Decovita is committed to enforcing policies which allow our resellers to maintain sustainable profit margins through the sale of our products. Decovita USA has an established Minimum Advertised Price (MAP) Policy that an Authorized Reseller must follow for the advertising and marketing of Decovita USA products. All Decovita USA Authorized Resellers must agree to the terms and conditions of the following MAP Policy.

$\label{lem:covita} \textbf{Decovita USA's MAP Policy Guidelines for Decovita Products}$

All advertised prices must be at or above MAP for all Decovita products. **Our Minimum Advertised Price (MAP) Policy states that no Decovita USA product can be advertised at more than 20% off the List Price.** Resellers are not required to list prices in advertising. If a price is listed in an advertisement it must be at or above MAP. Other statements such as "call for price" or "call for quote" are acceptable and permitted. Resellers are also responsible for ensuring their Decovita pricing is at or above MAP on internet search engines. Resellers are free to set the actual resale price of any product as long as it is at or above MAP price given the most recent publication of the price list. Decovita USA's MAP policy for all Decovita products apply to advertising placements, including but not limited to: print ads (inserts, magazines, newspapers, catalogs, mail order catalogs, etc.), broadcast (radio and TV), direct mail, faxes, internet placement with third parties (banner ads, broadcast emails, destination pages, third-party sites), internet placements on resellers own website, and any flyers, posters or coupons. From time to time, Decovita USA may permit resellers to advertise MAP Products at prices lower than the MAP price. In such events, Decovita reserves the right to modify or suspend the MAP price with respect to the affected products for a specified period of time by providing advance notice to all resellers of such changes.


Pricing Statements

Decovita USA's MAP Policy does allow resellers to omit pricing entirely from advertisements and/or advertisement statements such as "Call for Price," "Call for Quote" or "See Shopping Cart for Price."

Free Offers Associated with Decovita USA Products

Free shipping and/or handling, 0% sales tax, or free financing promotions do not violate the MAP $^{\circ}$

NOTES



DECOVITA-USA INC.

USA HEADQUARTERS & VIRGINIA SALES and DISTRIBUTION CENTER 45190 Prologis Plaza, Suite 190, Sterling, VA 20166 Office: (+1) 571 926 83 26

> CALIFORNIA SALES and DISTRIBUTION CENTER 1623-1625 S. Sunkist St. Anaheim, CA 92806 Office: (+1) 714 406 15 00

TEXAS SALES and DISTRIBUTION CENTER 5870 W. Fuqua Street Suite #100 Houston Texas, 77085 Office: (+1) 281 915-0884

E-mail: info@decovitausa.com



